



SAC762 Surveillance Joystick

User-friendly controller for speed-dome cameras



A versatile joystick designed for use with MESSOA's SDS700 and NIC900 series cameras, the SAC762 makes surveillance easy by providing superior control over MESSOA speed domes.

- **Multifunctional**

Delivers easy access to and management of all standard PTZ camera functions, including the recall of presets, alarm functions, and pan, tilt and zoom. The joystick also controls higher-level speed-dome functions, including home presets, remote resets, mini tours and privacy zones.

- **Two-line LCD Display**

Unlike LED design, two-line LCD has 32 characters to display functions which make users easily understand what functions they operate.

- **Three-Axis Control**

Provides direct control over camera pan/tilt/zoom functions.

2009.10.13 version.


MESSOA reserves the right to update this datasheet at any time without notice.

MESSOA USA e-mail:info.us@messo.com/MESSOA Taiwan e-mail:info@messo.com

Specifications

General	
Serial interfaces	1 x control unit interface with two physical connections PORT1 and PORT2
Connections	terminal block, 2 x RS485
Protocol	Pelco D/P, MESSOA D/P (selectable via menu)
Baud rate	2400, 4800, 9600 (selectable via menu)
Housing	High impact ABS
Control elements	32 keys, 1 joystick (3-axis)
LCD display	two-line LCD display
Dimensions(WxHxD)	350mm x 106mm x 200mm (13.88" x 4.2" x 7.9")
Power	DC12V, 150mA
Power consumption	1.8W
Operating temperature	-5°C ~ 50°C (23°F~122°F)
Operating humidity	10%~90% RH, no-condensing
Storage temperature	-20°C ~ 60°C (-4°F~140°F)
Weight	950 g (2.1 lb)

Dimensions

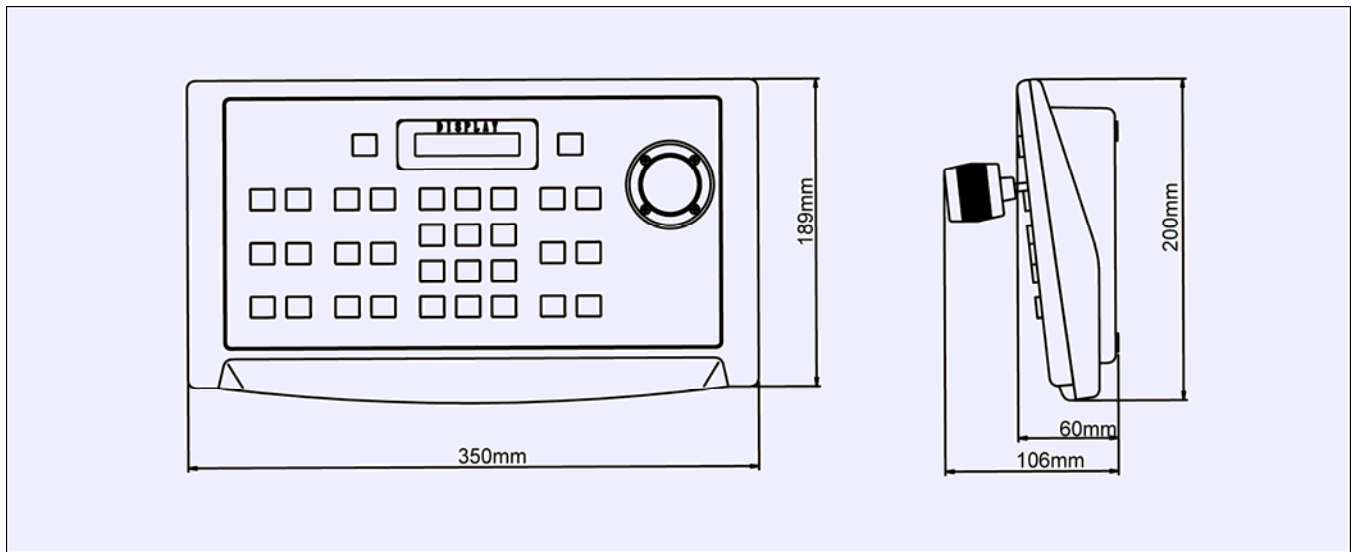

2009.10.13 version.

MESSOA reserves the right to update this datasheet at any time without notice.

MESSOA USA e-mail:info.us@messo.com/MESSOA Taiwan e-mail:info@messo.com