


PYRAMID

STAR DRIVER

PY-STR...

PY-STR	without network cards	PY-STR-2-H	RS485, High speed
PY-STR-1-H	FTT10, High speed	PY-STR-3-L	Fibre, Low speed
PY-STR-2-L	RS485, Low speed	PY-STR-3-H	Fibre, High speed

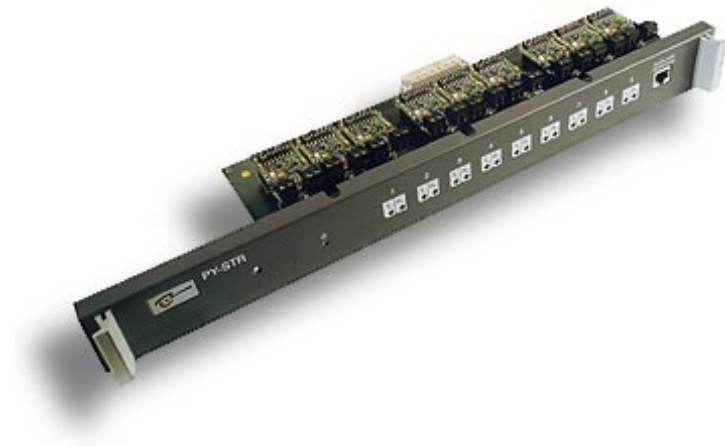

FEATURES

- Enables managed network design
- Multiple and mixed transmission standards supported
- RS485, FTT10, RS422, TTL and fibre optic
- Keyboard test connection
- Network segments / Star Driver

Specifications

Network plug-in cards	PY-FTT for FTT10 (High speed only) PF-19 or PY-F17 for fibre PY-COM for RS485 PY-COM for RS422 PY-COM for TTL
Number of cards	Up to 9 maximum in any combination
Dimensions	483 x 45 x 145mm 19" 1U rack mountable
Material	Mild steel
Power supply	12V DC $\pm 10\%$, 1A class 2
Power consumption	20W
Weight	5kg
Connections	Removable screw-terminal blocks



BAXALL LIMITED