



## VideoJet 8000 8-channel MPEG-2 Encoder



- ▶ 8-channel Encoder
- ▶ 25 IPS on Every Channel Simultaneously
- ▶ MPEG-2 @ 4CIF
- ▶ Internal Storage (120/240/600 GB)
- ▶ Gigabit Ethernet
- ▶ 10 Alarm Inputs
- ▶ Low Profile Rack-mountable
- ▶ Multicasting
- ▶ Serial Data Port

The VideoJet 8000 delivers the highest quality real-time video available today. Its advanced hardware engine produces 30 images per second of pure MPEG-2 DVD-quality video. This power is further multiplied by incorporating multiple encoders within the single unit, delivering eight full-motion video channels. Each channel generates fully interlaced non-multiplexed video at 30 IPS.

The video can be viewed on a standard PC using the VIDOS video management software or a web browser. Alternately, when used in conjunction with an MPEG-2 hardware decoder (such as the VIP 1000E), you can create point-to-point hybrid analog/digital solutions. This technology uses the highest quality analog cameras and analog CCTV monitors, but with a pure IP solution in-between.


The VideoJet 8000 8-channel MPEG-2 encoder features three key recording modes. The simplest mode is continuous. The alarm-sensitive mode also runs continuously, but increases the frame rate on alarm. A pre-alarm option preserves a short segment of video just prior to the alarm, at 1, 2, or 25/30 IPS (PAL/NTSC).

The VideoJet 8000's 120, 240, or 600 GB internal hard disk records weeks at a time locally, or for more extended recording periods it can use the VIDOS-NVR network video recorder. Such an NVR server has up to six RAID5 disk arrays

attached for maximum fault tolerance and a storage capacity of over 36 TB.

The VideoJet 8000 is powerful enough to simultaneously allow MPEG-2 live viewing, recording, playback, and backup. With eight channels in a rack-mountable 1U form factor it offers the highest port density at this quality of video. Combined with a complete set of security and distributed system management features it is the market's most powerful, highest quality MPEG-2 encoder and recorder.

Installation/Configuration Notes

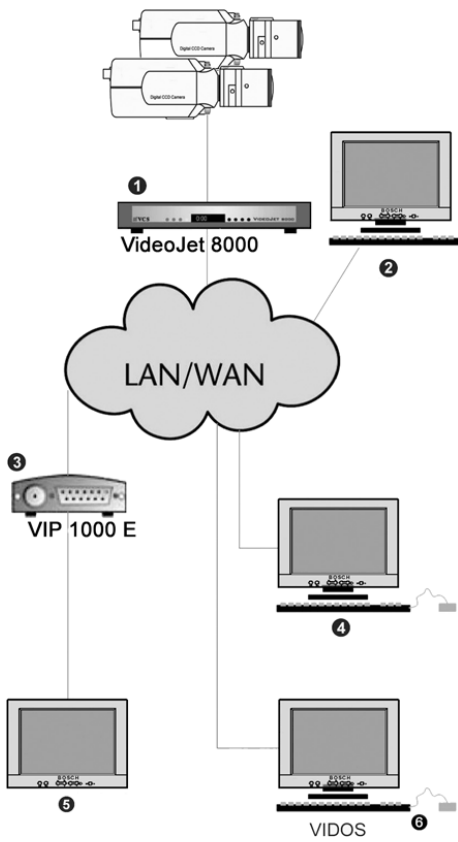



- |                          |                       |
|--------------------------|-----------------------|
| 01 VideoJet 8000 Encoder | 04 Web Browser        |
| 02 VIDEOS Workstation    | 05 Analog Monitor     |
| 03 VIP 1000E Decoder     | 06 VIDEOS Workstation |




- |                      |              |
|----------------------|--------------|
| 01 Power Indicator   | 05 Menu/exit |
| 02 HDD indicator     | 06 Set       |
| 03 Failure indicator | 07 UP        |
| 04 Display           | 08 Down      |



- |                                  |                                  |
|----------------------------------|----------------------------------|
| 01 Video In                      | 06 ISDN port (EU only)           |
| 02 75 Ohm Video Termination (x8) | 07 GigaBitEthernet 10/100 Base-T |
| 03 Alarm inputs (10x)            | 08 Fan 1                         |
| 04 USB Port                      | 09 Fan 2                         |
| 05 COM Port: RS232/485           | 10 Power Connector               |

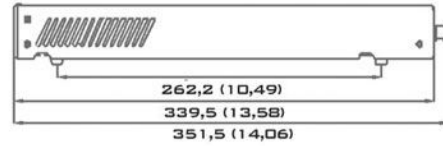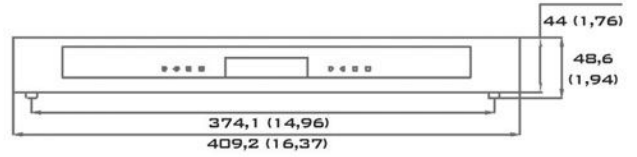

Dimensions in mm (inches)

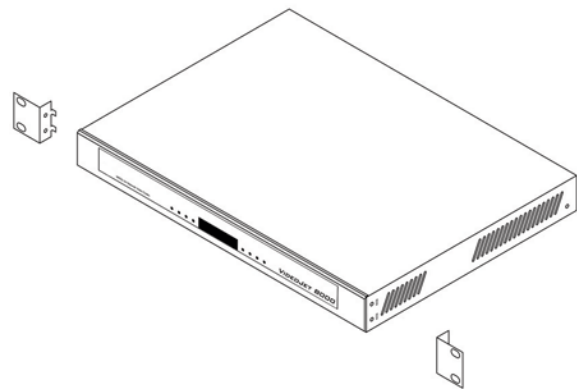

Rack Mount Kit

Parts Included

Quantity	Component
1	VideoJet 8000 with internal wide range power supply incl. IEC power cable
1	RS232 Null modem cable
1	Accessory Kit (19" rack mounting)
1	Quick Installation Guide
1	CD-ROM with manual

## Technical Specifications

### Electrical

#### VideoJet 8000 MPEG-2 Encoder

Video Standards	ISO/IEC13818-2 (MPEG-2) MP@ML
Video Data Rate	1 - 5 Mbps per channel constant & variable
Video Frame-rate	1-25/30 IPS (PAL/NTSC); Field/frame-based coding
Video Resolution	704 x 576/480 (4CIF: 25/30 IPS*) (D1) 352 x 288/240 (CIF: 25/30 IPS*)
Storage Media	HDD integrated
GOP Structure	I, IP, IPB, IPBB
Overall Delay (IP)	174/164 ms (PAL/NTSC)
Select Frame Rate	25/30 IPS streaming (PAL/NTSC) 1, 2 or 25/30 IPS internal recording Field/frame-based coding
Multiplex Standards	ISO/IEC 13818-1 (MPEG-2)
Stream Types	Video Elementary Stream VES(video only)
Network Protocols	RTP, Telnet, UDP, TCP, IP, HTTP, IGMP, ICMP, ARP, SNMP
Software Update	Flash ROM, remote programmable
Configuration	Via Web browser, built-in Web server Interfaces or serial interface
Video In	8x Analog composite: NTSC/PAL; BNC connector 75 Ohm switchable, 0.7 - 1.2 Vp-p
Alarm In	10x (non-isolated closure contact type), max. activation resistance 10 Ohm
Connectors	20-way spring clamp for alarm inputs
COM Ports	1x RS-232/422/485, RJ-45
Ethernet	10/100/1000Base-T, auto-sensing, half-/full-duplex, RJ-45

\*)Depends on picture content

### Environmental

Input Voltage	90 - 250 VAC, 50/60 Hz
Power Consumption	Max. 60 VA
Weight	App. 6.0 kg (13.22lbs) with 240 GB HD
Operating Temperature	0°C - 40°C (32°F - 104 °F) ambient temperature
Humidity	20 - 80%, atmospheric humidity (not condensing)
Approvals	CE: IEC 60950; UL 1950; J 60950; AS/NZS 3548; EN 55103-1, -2; EN 55130-4; EN 55022; EN 55024; EN 61000-3-2; EN 61000-3-3; FCC 47 CFR Ch.1 Part 15

## Ordering Information

### Model | Description

VJ8000 2906	8 channels MPEG-2, DVR and encoder with 120 HDD
VJ8000 2926	8 channels MPEG-2, DVR and encoder with 240 HDD
VJ8000 2927	8 channels MPEG-2, DVR and encoder with 600 HDD
VJ8000A 2907	8 channels MPEG-2 with 1 MPEG4 channel DVR and encoder with 120 HDD audio
VJ8000A 2936	8 channels MPEG-2 with 1 MPEG4 channel DVR and encoder with 240 HDD audio
VJ8000A 2937	8 channels MPEG-2 with 1 MPEG4 channel DVR and encoder with 600 HDD audio

**Americas:**  
Bosch Security Systems  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 585 223 4060  
Fax: +1 800 289 0096  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: +31 (0) 40 27 83955  
Fax: +31 (0) 40 27 86668  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Bosch Security Systems Pte Ltd  
38C Jalan Pemimpin  
Singapore 577180  
Phone: +65 6319 3450  
Fax: +65 6319 3499  
apr.securitysystems@bosch.com  
www.boschsecurity.com

### Represented by