

## DH-HAC-HFW2220R-VF-IRE6

---

### 2.4Megapixel 1080P Water-proof HDCVI IR-Bullet Camera



#### Features

- 1/2.8" 2.4Megapixel CMOS
- 25/30fps@1080P, 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and SD switchable
- OSD Menu, control over coaxial cable
- DWDR, Day/Night(ICR), AWB, AGC, BLC, 3DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 60m, Smart IR
- IP67, DC12V


# DH-HAC-HFW2220R-VF-IRE6

## Technical Specifications


| Model                  | DH-HAC-HFW2220RP-VF-IRE6   | DH-HAC-HFW2220RN-VF-IRE6 |
|------------------------|--|--------------------------|
| <b>Camera</b>          |  |                          |
| Image Sensor           | 1/2.8" 2.4Megapixel CMOS   |                          |
| Effective Pixels       | 1984(H)×1225(V)  |                          |
| Electronic Shutter     | 1/3s~1/100,000s  |                          |
| Video Frame Rate       | 25/30/50/60fps@720P; 25/30fps@1080P  |                          |
| Synchronization        | Internal   |                          |
| Mini. Illumination     | 0.05Lux/F1.4, 0Lux IR on   |                          |
| Video Output           | 1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch) |                          |
| <b>Camera Features</b> |  |                          |
| Max. IR LEDs Length    | 60m, Smart IR  |                          |
| Day/Night              | Auto(ICR) / Color / B/W  |                          |
| Noise Reduction        | 2D/3D  |                          |
| OSD Menu               | Support  |                          |
| <b>Lens</b>            |  |                          |
| Focal Length           | 2.7~12mm   |                          |
| Angle of View          | H: 93° ~35°  |                          |
| Lens Type              | Manual / Fixed Iris  |                          |
| Mount Type             | Φ14  |                          |
| <b>General</b>         |  |                          |
| Power Supply           | DC12V±20%  |                          |
| Power Consumption      | Max 8.5W   |                          |
| Working Environment    | -30°C~+60°C / Less than 95%RH (no condensation)  |                          |
| Transmission Distance  | Over 500m via 75-3 coaxial cable   |                          |
| Ingress Protection     | IP67   |                          |
| Dimensions(W×D×H)      | 213mm×80mm×72mm  |                          |
| Weight                 | 0.55kg   |                          |
| Material               | Metal  |                          |

# DH-HAC-HFW2220R-VF-IRE6

## Dimensions (mm)

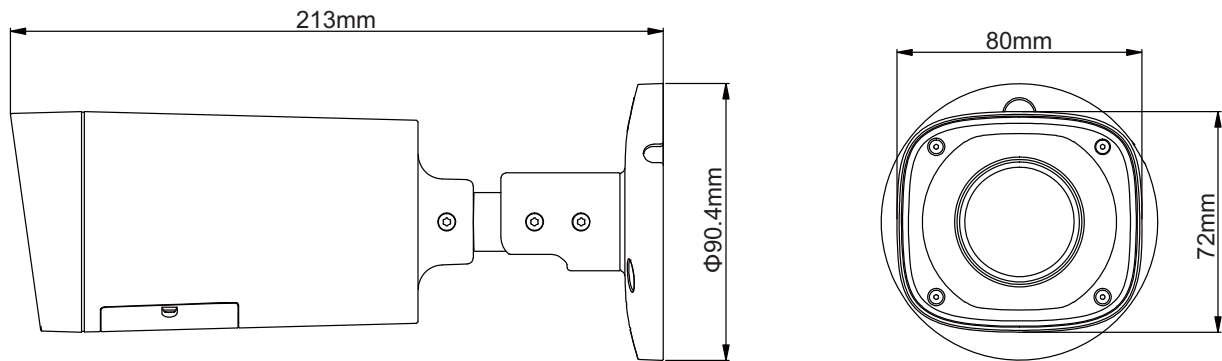

## Accessories (optional)

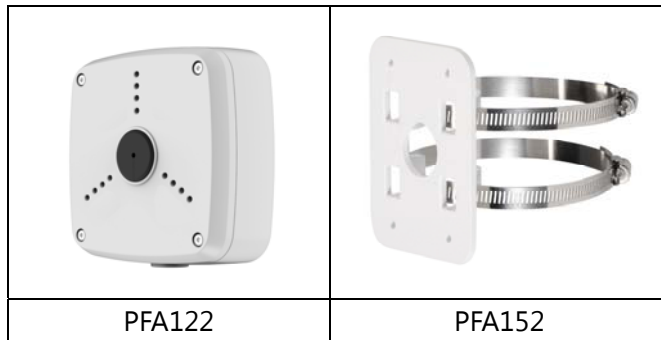

---

### Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)

[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.