

ITALE-060AA-P

LED Strobe Lamp



Order Information

ITALE-060AA-P

Features

- Support stroboflash
- Adopt ATMEL AVR high capability MCU
- Adopt advanced steady flowing technique, precise and stable current control
- Adopt Cree high capability white LED, energy saving and environmental protection
- Support illuming automatically according to environment brightness
- Support video and snapshot synchronization
- Support adjusting frequency and brightness of stroboflash
- Support device cascading
- Low recycle time



ITALE-060AA-P

Technical Specifications

Model	ITALE-060AA-P
Main processor	ATMEL AVR MCU
Interface	RS485, IO
LED lamp beads	16 Cree high bright LED lamp beads
Remote Control	Control to light up and go out by camera
Strobe Duration	1, 2, 3ms Optional
Video and Strobeflash Synchronization	Support
Snapshot and Strobeflash Synchronization	Support
Cascading	Support cascading of 5 device
RS485	One RS485 Port, can connect PC
Parameter Setup	Support configure by web or client
Brightness of strobeflash	Support adjusting
Frequency of strobeflash	Support frequency of 50、60、75、90、100、120Hz
Pattern of strobeflash	Active or Passive Mode
Brightness of environment	Support adjust, 1~6
Recycle time	≤45us
Upgrade	By RS485
luminous flux	40lx in 20 meters
Power	AC90~285V
Power Consumption	Strobe flash≤40W
Beast using distance	18~25 meters
Work Environment	Work temperature -40℃~+80℃, Work humidity:10%~95%
Dimensions	157.2mm*212.0mm*62.6mm
Weight	2Kg

ITALE-060AA-P

Dimensions (mm)

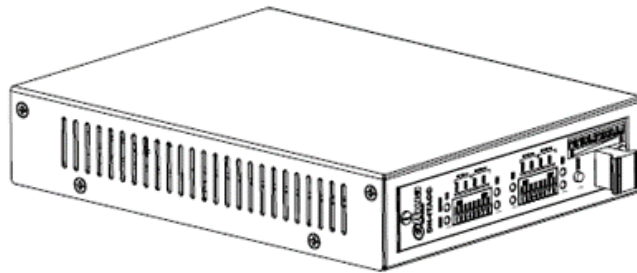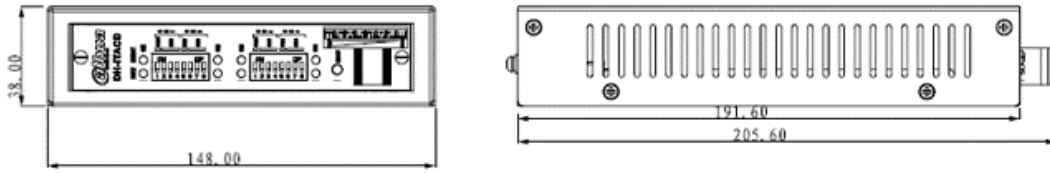

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.