

# Video Security

Network Cameras | eneo Network Cameras

## ENC-501L

1/3" Network Colour Camera w. CS Mount,  
integr. Web Server, 5VDC/230VAC, 340TVL

Art-No. 91423



## Features

1/3" CCD Colour Network Camera  
Horizontal Resolution of 340 TV Lines  
Automatic Shutter Control (AES)  
C/CS Mount  
MJPEG Compression  
Simultaneous Video and Audio Signal Transmission

E-Mail and FTP Transmission of Important Events  
Activity Detection  
Ethernet Interface: 10/100Base-TX  
6mm Lens and Mounting Bracket Supplied  
SD Socket for Local Video Storage by SD Cards

## Specifications

System	CCIR/PAL
Imager	1/3" interlaced CCD
Resolution	340 TV lines (camera), 352x288 Pixels
Sensitivity at 50% video signal	0.26Lux at F1.2 (VT measurement result)
Automatic shutter control (AES)	1/50-1/100,000/sec.
Activity detection	Integrated motion detector
Lens mount	C/CS
Usable iris controls	Manual/DC controlled iris
Secondary Storage	Via SD card
Video output	1Vp-p, CVBS, 75ohms, BNC
Compression standard	M-JPEG
Frame rate	25 frames/sec. max.(recording mode), up to 15 frames/sec. (streaming mode), Picture size: 4~64kB
Transmission rate	up to 15 frames/sec.
Image display	Via Web Browser or Lan-Cam-Viewer Software
Alarm input	1 (software controlled)
Alarm outputs	Open collector (5V / 0.02A max.)
Alarm handling	Automatic connection setup to a specified IP address

## ENC-501L

(Specifications continued)

<b>Ethernet interface</b>	10/100 Base-TX, RJ45
<b>Ethernet protocols</b>	TCP/IP, UDP, ICMP, FTP, DHCP, PPP, HTTP, DNS, DNNS
<b>Software upgrade</b>	Via SD card
<b>Operation protection</b>	Multilevel and Multiuser - Password protected
<b>Serial interfaces</b>	RS-232, RJ 45 connector
<b>Supply voltage</b>	5DC +/-10%
<b>Camera mount</b>	CS 1/4" - 20 UNC thread on bottom side
<b>Housing</b>	Metal
<b>Colour</b>	Grey
<b>Temperature range</b>	5°C - 50°C
<b>Dimensions (HxWxD)</b>	50x62x95mm (see drawing)
<b>Weight</b>	Approx. 300g
<b>Parts supplied</b>	LanCam Viewer Software, Power supply 230V/50Hz - 2A, C/CS mount ring, 6mm lens, Wallbracket

## Accessories

<b>47147 / F0312NDDC-NFS</b>	F1.2/2.8mm DC Lens with No Focus Shift, 1/3" CS Mount
<b>47148 / F0412NDDC-NFS</b>	F1.2/4mm DC Lens with No Focus Shift, 1/3" CS Mount
<b>47149 / F0612NDDC-NFS</b>	F1.2/6mm DC Lens with No Focus Shift, 1/3" CS Mount
<b>47154 / F0812NDDC-NFS</b>	F1.2/8mm DC Lens with No Focus Shift, 1/3" CS Mount
<b>43237 / F03Z04NDDC-NFS</b>	F1.4/2.8-11mm DC Lens/var. Focal Length No Focus Shift, 1/3" CS Mount
<b>43238 / F03Z2.710DC-NFS</b>	F1.0/3-8mm DC Lens/var. Focal Length with No Focus Shift, 1/3" CS Mount
<b>45251 / YV10X5R4A-SA2L</b>	F1,6/5-50mm DC Varifocal Lens with No Focus Shift, 1/3" CS Mount
<b>47156 / F0312M-NFS</b>	F1.2/2.8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
<b>47157 / F0412M-NFS</b>	F1.2/4mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
<b>47158 / F0612M-NFS</b>	F1.2/6mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
<b>47159 / F0812M-NFS</b>	F1.2/8mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
<b>43239 / A10Z04NDDC-NFS</b>	F1.4/10-40mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount
<b>71856 / DNR-108/80</b>	Digital IP Recorder (8 Channel), 80Gb 12VDC/230VAC
<b>71848 / SD CARD/256</b>	SD Memory Card 256MB f. DSR-01/-01N/-04N Video Recorder, ENC-501 Camera Series
<b>76011 / ZELARIS_AC S</b>	Surveillance Software for Network Cameras from Eneo, Axis
<b>76012 / ZELARIS_AC C</b>	Client Software for Zelaris_AC S
<b>43248 / A04Z12NDDC-NFS</b>	F1.2/4-12mm DC Lens/var. Focal Length with No Focus Shift, 1/2" C Mount
<b>47161 / F0212NDDC-NFS</b>	F1.2/2.2mm DC Lens with No Focus Shift, 1/3" CS Mount

## ENC-501L

(Accessories continued)

<b>47162 / F0212M-NFS</b>	F1.2/2.2mm Fixed Focal Length Lens with No Focus Shift, 1/3" CS Mount
<b>43249 / F07Z07NDDC-NFS</b>	F1.3/7.5-50mm DC Lens/var. Focal Length with No Focus Shift, 1/2" CS Mount
<b>43251 / G04Z03NDDC-NFS</b>	F1.2/4.5-12.5mm DC Lens/variable Focal Length, No Focus Shift, 1/2" CS Mount
<b>43252 / G04Z03M-NFS</b>	F1.2/4.5-12.5mm Lens, Var. Focal Length with No Focus Shift, 1/2", CS Mount

## Accessories of



<b>71856 / DNR-108/80</b>	Digital IP Recorder (8 Channel), 80Gb 12VDC/230VAC
<b>71875 / DNR-108/80W</b>	Digital W LAN IP Recorder (8 Channel), 80Gb, 12VDC/230VAC

## Product Information

Viewer Software for the recording of upto 4 cameras ENC-1001P

System requirements for the Viewer Software:

- Standard PC with P-IV processor and >1.8GHz system clock
- Windows 2000 or Win XP (in preparation)
- Network connection 10/100 Base-Tx
- Internet Explorer 5 or higher
- Hard disk 80Gb, depend on recording demand
- RAM 512Mb (recommended)

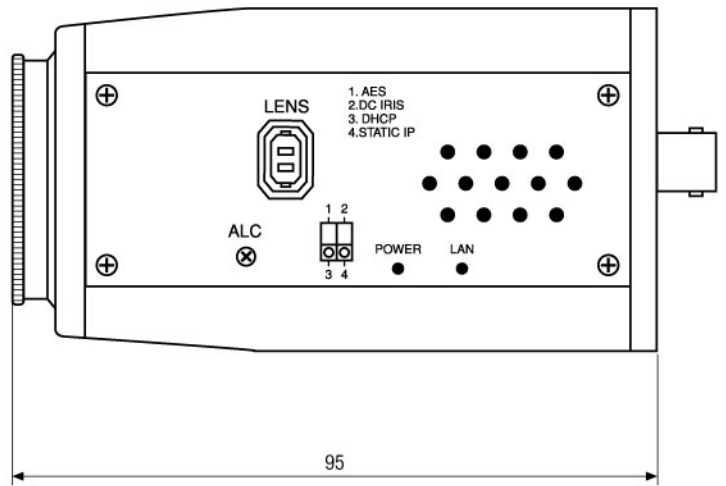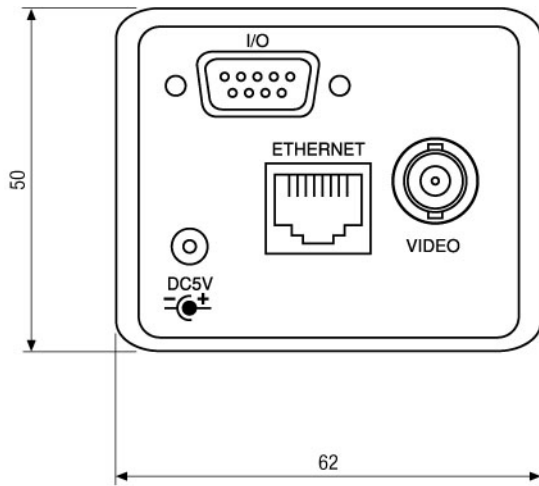

Maße/Dimensions: mm

VIDEOR TECHNICAL E. Hartig GmbH  
 Carl-Zeiss-Straße 8 · 63322 Rödermark · Germany  
 Telefon +49 (0) 60 74/8 88-0 · Telefax +49 (0) 60 74/8 88-100  
 info@videortechnical.com · www.videortechnical.com