



## VKC-1338A/PIR

Article-No.: 92586

1/3" Camera, Colour, 3.7mm,  
550TVL, PIR Sensor, 12VDC

### Mainfeatures

For wall mounting  
Built-in pinhole lens F2.0/3.7mm  
Automatic shutter control (ESC)  
Internal synchronization  
Supply voltage: 12VDC

Resolution of 550 horizontal lines  
Automatic gain control (AGC)  
Automatic white balance (AWB)  
PIR sensor function  
Easy installation


### Specifications

System	colour
Video standard	PAL
Sensor size	1/3"
Imager	CCD
Imager	Sony Super HAD II Interline Transfer
Active picture elements	752 x 582 Pixel
Synchronization	internal
Signal-to-noise ratio	>48db (AGC OFF)
Gamma correction	0.45
Horizontal resolution	550 TVL
Sensitivity (at 50% video signal)	3,0 Lux
Sensitivity (at 50% video signal)	at F2.0 (1.1Lux at F1.2))
Automatic electronic shutter (ESC)	1/50 - 1/110,000sec.
Low speed shutter	no
Automatic gain control (AGC)	yes
Digital Noise Reduction (DNR)	no
White balance	AWB



## Specifications (continued)

Backlight compensation	no
Wide Dynamic Range (WDR)	no
Aperture Correction (APC)	horizontal and vertical
IR cut filter	standard
Video outputs	composite (CVBS)
Lens type	fixed focal length
Focal length	3,7 mm
PTZ support	no
Digital zoom	no
Horizontal angle of view	68°
MOD (Minimum object distance)	0,2 m
Illumination	no
Activity detection	no
Serial interfaces	no
External connections	video (BNC), 12VDC input (DC plug),
Temperature range (operation)	-10°C ~ +50°C
Housing material	plastic
Integrated wall mount	yes
Hidden cable management	no
Sunshield	no
Window heater	no
Colour (housing)	light grey
Vandalism resistant	no
Protection rating	n/a
Alarm inputs	-
Alarm outputs	-
Supply voltage	12VDC
Supply voltage	(+/-10%)
Power consumption	2.5W
Dimensions (HxWxD)	see drawing
Weight	190g
Parts supplied	wall and ceiling mount bracket, bag of screws, , manual
Certificates	CE


## Optional Accessories

Image	Artikel-Nr. / Typ	Description
	VT-PS12DC-8	Plug-in Power Supply Unit 100-240VAC 12VDC (1.0Amp), Regulated, with DC Plug

### Optional Accessories (continued)

Image	Artikel-Nr. / Typ	Description
	VT-PS12DC-7	Pluggable PSU w. Cont. & UK Mains plug-in 100-240VAC/12VDC-1.25A, Regulated
	VT-PS12DCDT1	PSU 12VDC/1.0A, Regulated, Desktop Version, 1.8m Cables each w. open ends

### Technical Drawing

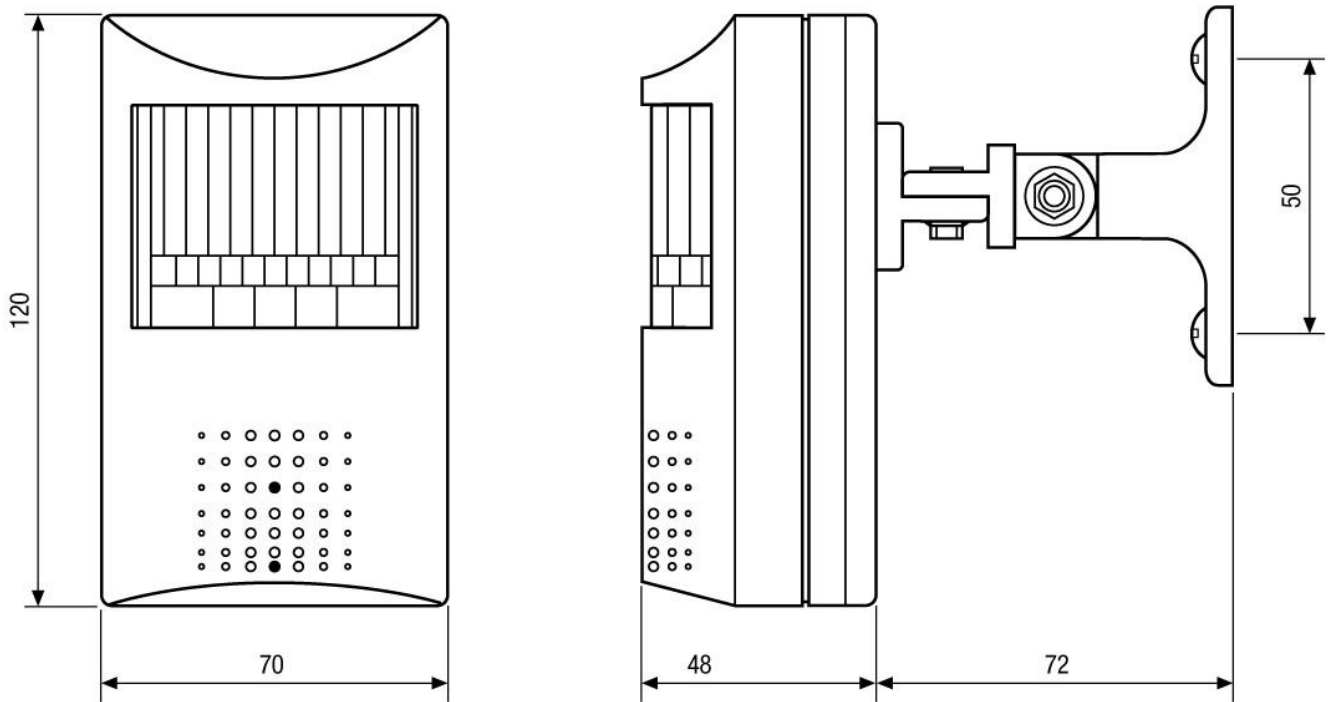

Maße/Dimensions: mm



*Your partner for eneo products:*

