


D60x16.7SR4DE Series / D60x16.7SR4FE

60x

Applicable to 1/1.8

Applicable camera (model) 1 2/3 1/1.8 1/2 1/3 1/4

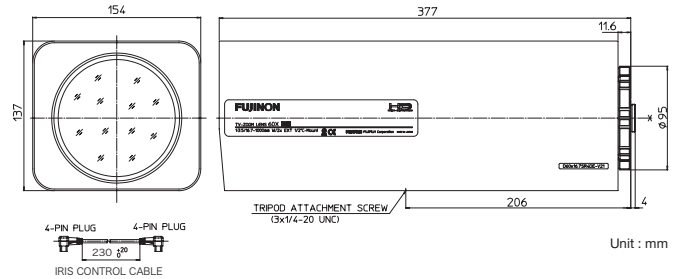

Unit : mm

ZOOM **MOTOR DRIVE** **TELE** **AF** **OS-TECH** **DC** **IRIS-REMOTE** **C-mnt** **METAL** **PRESSET** **ND** **2x** **PC** **SERVO** **RoHS** **VISIBLE LIGHT CUT** **HD** **2MP**

		Applicable to 1/1.8		Applicable to 1/1.8		Applicable to 1/1.8	
		D60x16.7SR4DE-V21		D60x16.7SR4DE-ZP1A (AF)		D60x16.7SR4FE-ZP1C (AF and Anti-Vibration)	
Focal Length (mm)		1x		16.7 - 1000 (60x)			
		2x		33.4 - 2000			
Iris Range		1x		F3.5 - F16			
		2x		F7.0 - F32			
Filter				ND (1/8, 1/64), Visible Light Cut			
Operation	Zoom		Motor Drive				Servo Control
	Focus		Motor Drive				Servo Control
	Iris			Auto(DC type) or Remote*1			
AF			N/A			Available (with analog camera)	
Optical Anti-Vibration				N/A			Available
Angle of View (HxV)	1/1.8"	1x	WIDE	23° 5' x 17° 41'			
			TELE	0° 25' x 0° 19'			
	2x	WIDE	11° 46' x 8° 54'				
		TELE	0° 12' x 0° 9'				
1/2"	1x	WIDE	20° 53' x 15° 55'				
		TELE	0° 22' x 0° 17'				
	2x	WIDE	10° 35' x 7° 59'				
		TELE	0° 11' x 0° 8'				
Angle of View (HxV) (16:9)	1/1.8"	1x	WIDE	24° 56' x 14° 34'			
			TELE	0° 27' x 0° 15'			
	2x	WIDE	12° 47' x 7° 18'				
		TELE	0° 14' x 0° 8'				
1/2"	1x	WIDE	22° 35' x 13° 6'				
		TELE	0° 24' x 0° 14'				
2x	WIDE	11° 30' x 6° 32'					
	TELE	0° 12' x 0° 7'					
Focus Range (From the Lens Front) (m)				∞ - 5			
Object Dimensions at M.O.D. (H x V) (4:3) (mm)	1/1.8"	1x	WIDE	1975 x 1504			
			TELE	35 x 27			
	2x	WIDE	998 x 753				
		TELE	18 x 13				
1/2"	1x	WIDE	1782 x 1353				
		TELE	32 x 24				
	2x	WIDE	896 x 676				
		TELE	16 x 12				
Object Dimensions at M.O.D. (H x V) (16:9) (mm)	1/1.8"	1x	WIDE	2137 x 1237			
			TELE	38 x 22			
	2x	WIDE	1084 x 617				
		TELE	19 x 11				
1/2"	1x	WIDE	1931 x 1111				
		TELE	34 x 20				
2x	WIDE	974 x 553					
	TELE	17 x 10					
Back Focal Distance (in air) (mm)				24.85			
Exit Pupil Position (From Image Plane) (mm)				(1x) -448.80 (2x) -85.23			
Filter Thread (mm)				M112 x 0.75			
Mount				C			
Extender				2x			
Mass (kg)			6.5				7.1
Standard Accessories				IRIS CONTROL CABLE			
Wiring Diagram				P22			

* 1 : For details on the Iris-Remote connection, see the relevant Technical Reference (Page 28).