




MULTIPLEXER SERIES



ZS-DX109P / ZS-DX109C / ZS-SX109P

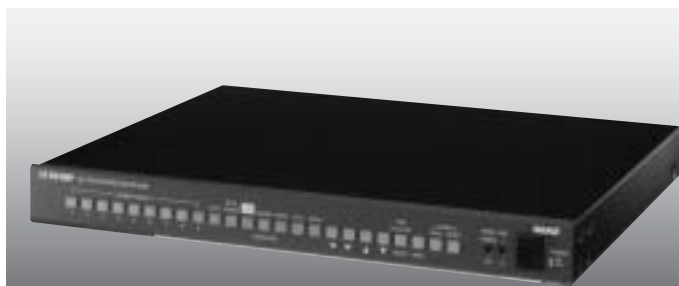

ZS-DX116P / ZS-DX116C / ZS-SX116P

Specification / Multiplexer Series PAL Version

Model Number		ZS-DX109P	ZS-DX109C	ZS-SX109P	ZS-DX116P	ZS-DX116C	ZS-SX116P
TV System		PAL	CCIR	PAL	PAL	CCIR	PAL
Switching Operation		Full - Duplex		Simplex	Full - Duplex		Simplex
Effective Pixels		720 x 552 Pixels					
Resolution		480 TV Lines					
Video Input	Camera	9ch			16ch		
	VCR	1.0V(p-p) 75 Ω, BNC					
Video Output	Camera Through	9ch			16ch		
	VCR	1.0V(p-p) 75 Ω, BNC					
	Monitor	2ch, 1.0V(p-p) 75 Ω, BNC					
	VCR Input	2ch, -10dBV, More Than 50k Ω, RCA					
Audio	Monitor Output	1ch, -10dBV, Low Impedance, RCA					
	Alarm Input	9ch			16ch		
Alarm Output	For Alarm Input	No-Voltage Make Contact Input, Open Voltage : 5VDC Short Circuit Current : 5mA, D-sub 25Pins Connector					
	For Video Loss	1ch					
	For Alarm Hold	NPN Open Collector Output, Withstand Voltage : 20VDC Control Current : Less Than 20mA, D-sub 25Pins Connector					
Alarm Duration Time		Manual, 10, 15, 20, 30Sec., 1, 2, 3, 4, 5Min., Infinite					
Remote Input		11ch (6ch : Binary Input), No-Voltage Make Contact Input, Open Voltage : 5VDC Short Circuit Current : 5mA, D-sub 25Pins Connector					
Remote Output		10ch (6ch : Binary Output) NPN Open Collector Output, Withstand Voltage : 20VDC Control Current : Less Than 20mA, D-sub 25Pins Connector					
VCR Control	Trigger Input	2ch, No-Voltage Make Contact Input, Open Voltage : 5VDC Short Circuit Current : Less Than 0.3mA					
	Alarm Output	2ch, NPN Open Collector Output, Withstand Voltage : 20VDC Control Current : Less Than 20mA, D-sub 25Pins Connector					
Live Screen	Main Monitor	Full, 4Way, 9Way, 10Way, 16Way (ZS-DX116P / ZS-DX116C / ZS-SX116P) Split Screen (2x) Zoom Up Screen					
	Spot Monitor	Full					
Playback Screen		Full, 4Way, 9Way, 16Way (ZS-DX116P / ZS-DX116C / ZS-SX116P) Split Screen (2x) Zoom Up Screen					
Titling Character		8 Characters					
External Control		1ch, RS-232C, D-sub 9Pins Connector					
Power Input		220 to 240VAC, 50/60Hz					
Power Consumption		17W			18W		
Operating Temperature		0 ~ +40					
Dimensions		420.0 (W) x 51.8 (H) x 334.1 (D) mm			420.0 (W) x 96.6 (H) x 333.9 (D) mm		
Weight		Approx. 3.5kg			Approx. 4.3kg		

Specifications are subjected to change without any notice for further improvement.



CBC GROUP

<http://www.cbc.co.jp>

Tokyo Osaka Nagoya Fukuoka Kanazawa Sendai
New York Los Angeles London Milan Paris Dusseldorf Warszawa
Hong Kong Taipei Jakarta Bangkok Singapore Shanghai Beijing Bangladesh