




**COVERT CAMERA**  
**MONOCHROME**

# SD-300/A

● Monochrome camera inside a smoke detector


Miniature camera disguised as a smoke detector.

View from below

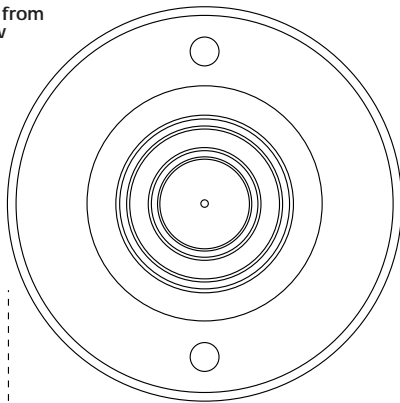

163.00mm



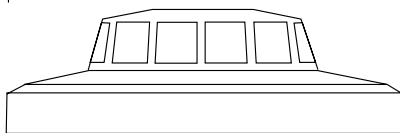


51.00mm



Side view



163.0mm(Diam) x 51.0mm(D) 155g

-  1/3" CCD
-  380 TV lines
-  0.3 lux sensitivity
-  Supply voltage: 9-12Vdc
-  Audio output: 1V p-p

Model options		
Lens	Model Number	Non-audio
4.0mm	SD-300/A	SD-300
2.5mm	SD-300/A/2.5	SD-300/2.5
6.0mm	SD-300/A/6.0	SD-300/6.0
8.0mm	SD-300/A/8.0	SD-300/8.0
12.0mm	SD-300/A/12.0	SD-300/12.0
Dummy	SD-300/D	

- Up to five cameras in a single housing
- Vertical viewing pinhole lens
- Ideal for any commercial or domestic environments
- Also available as a covert microphone


See Also:



SD-600/A  
Colour smoke detector camera



SD-350/A  
Industrial smoke detector camera housing



PI-350/A  
PIR camera

SPECIFICATION

VIDEO	
Image sensor	1/3" CCD sensor, 512 (H) x 582 (V) pixels
Horizontal resolution	380 TV lines or greater
Lens options	See table above
Electronic shutter	Automatic 1/60 to 1/100,000, 256 steps
Sensitivity	0.3 lux
Video output	625 line, 50 frame CCIR, 1Vp-p, 75 Ohms
Supply voltage / Power	9-12 Vdc / 125mA
Working temperature	-18°C to +60°C

AUDIO	
Microphone	Omni-directional electret
Audio output	1Vp-p, 600 Ohms
Audio bandwidth	100Hz - 10KHz, +/- 3dB

This data sheet is also available on disk.