


Weather- and dustproof housings

Series 300

Product information

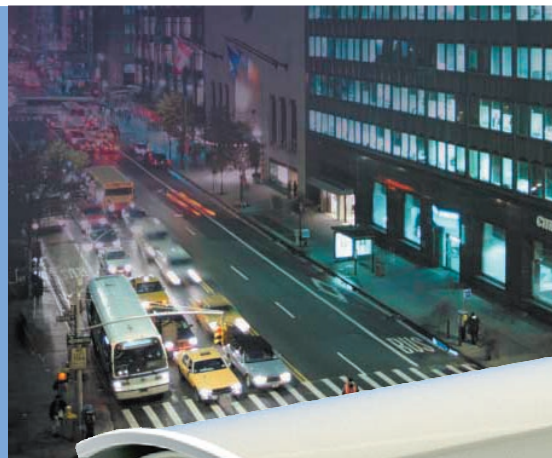


- 4-step mounting-height adjustment
- 3 x cable glands
- Self-regulating PTC heating element
- Temperature regulation via heating element and additional safety thermostat
- Isolated camera mounting to avoid ground-loops
- VDE approved construction
- IP-66 protection rating
- TÜV approved safety (German safety standards authority)

Technical data

Technical specification	WSG-302	WSG-304X
Heater supply	230 VAC	
Safety thermostat supply	Max. 250 VAC	
Thermostat functions	On: +8 °C / off: +15 °C	
Cable access	3 x PG-9 cable glands	
Dimensions (B x H x T) outer size	Approx. 133 x 124.6 x 476 mm (w x h x d)	Approx. 133 x 124.6 x 566 mm (w x h x d)
usable internal size	approx. 90.8 x 76.5 x 330 mm (w x h x d)	approx. 90.8 x 76.5 x 420 mm (w x h x d)
Finish	Powder coated, pebble grey, RAL 7032	
Protection rating	IP 66	
Order No.	5.15580	5.15620

Order No.	Type	Description
5.15590	SSG-302	Dustproof housing without self-regulating heater or sun-shield colour pebble grey, RAL 7032
5.15580	WSG-302	Weatherproof housing with self-regulating heater additional safety thermostat sun-shield colour pebble grey, RAL 7032 heater supply 230 VAC
5.15620	WSG-304X	Weatherproof housing with self-regulating heater additional safety thermostat sun-shield integrated cable distribution circuit board for connecting network, video, and control leads (for motorised zoom lenses), colour pebble grey, RAL 7032 heater supply 230 VAC

Dimensions WSG-302 / WSG-304 in mm

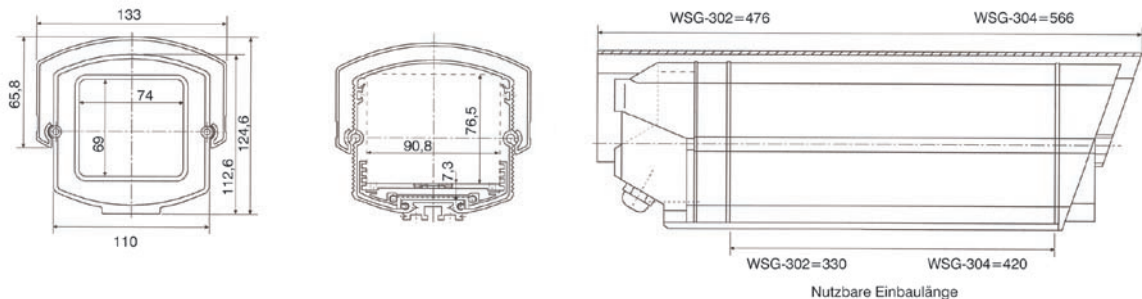

Technical alterations reserved