


## DS-2CC12P(N)-IR1(IR3) Analog IR Camera

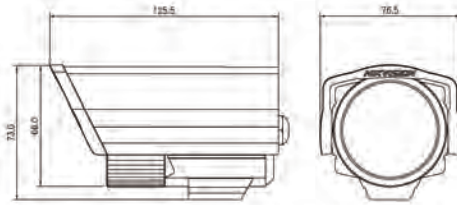

### Key Features

- Compact design
- 1/3" Sony CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

### Specifications

#### Camera

|                          |   |
|--------------------------|---|
| Image Sensor             | 1/3" Sony Super HAD CCD                           |
| Signal System            | PAL / NTSC  |
| Effective Pixel          | PAL: 752 (H) × 582 (V)<br>NTSC: 768 (H) × 494 (V) |
| Min. Illumination        | 0.1Lux @ F1.2 (0 LUX with IR)                     |
| Electronic Shutter Speed | 1/50(1/60)s to 1/100,000s                         |
| Lens                     | "-IR1" Series: 6mm<br>"-IR3" Series: 12mm         |
| Horizontal Resolution    | 480 TVL   |
| Sync. System             | Internal  |
| Video Output             | 1Vp-p Composite Output (75Ω / BNC)                |
| S/N Ratio                | 48 dB   |
| BLC                      | On  |

#### General

|                       |  |
|-----------------------|--|
| Operating Temperature | -10°C ~ 60°C   |
| Housing               | IP66 Standard  |
| IR Distance           | "-IR1" Series: Up to 10 Meters<br>"-IR3" Series: Up to 30 Meters |
| Power Supply          | 12V DC   |
| Power Consumption     | IR1: 3W Max.<br>IR3 : 6W Max.                                    |
| Dimension             | IR1: 76.5mm×73mm×125.5mm<br>IR3: 86.5mm×83mm×160mm               |
| Weight                | IR1: 600 g<br>IR3: 1000 g  |