



DS-2CC12C2S-IR HD720p IR Bullet Camera

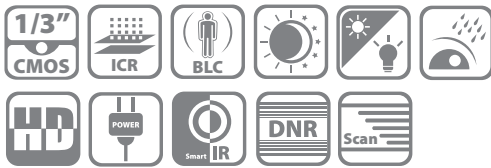

Key features

- HD720p video output
- True Day/Night
- Up to 20m IR Distance
- IP66 Weatherproof

Dimensions

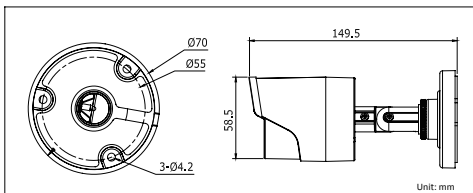

Available models

DS-2CC12C2S-IR

| DS-2CC12C2S-IR | |
|------------------------------|--|
| Camera | |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Effective Pixels | 1280(H)*720(V) |
| Min. Illumination | 0.01 Lux @(F1.2,AGC ON), 0 Lux with IR |
| Shutter Time | 1/100 s to 1/100,000 s |
| Lens | 3.6mm (2.8mm, 6mm optional) |
| | Angle of View: 78.8°(3.6mm), 103°(2.8mm), 51.2°(6mm) |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | 720p@25fps/720p@30fps |
| HD Video Output | SMPTE292M (HD-SDI) |
| General | |
| Working Temperature/Humidity | -10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12V DC±10% |
| Power Consumption | Max. 3W |
| Weather Proof Ratings | IP66 |
| IR Range | 20 meters |
| Dimension | Ø70×149.5 mm (Ø2.76" ×5.89") |
| Weight | 360 g (0.79 lb) |