



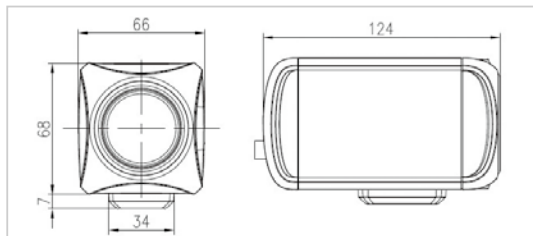

DS-2CZ282P/N 30x Color Zoom Camera

- Compact Structure Design
- 1/4" SONY CCD
- High Resolution: 540TVL(color), 600TVL(B/W)
- 30X Optical Zoom, 16X Digital Zoom
- OSD Menu Controlling
- IR cut filter with auto switch

Unit: mm

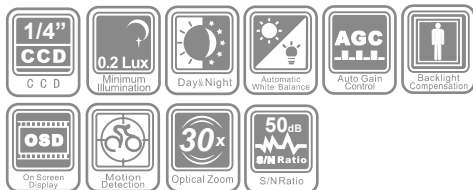

Specifications

		DS-2CZ282P/N
Camera	Image Sensor	1/4 " SONY Interline Transfer Super HAD CCD
	Effective Pixels	PAL: 752(H)×582(V) NTSC: 768(H)×494(V)
	Horizontal Resolution	540 TVL (Color) 600 TVL (B/W)
	Signal System	PAL/NTSC
	Min. Illumination	Color: 0.2Lux @ F1.4, 0.008Lux @ F1.4 (sensitivity×256) B/W: 0.02Lux @ F1.4, 0.0008Lux @ F1.4 (sensitivity×256)
	Electronic Shutter	1/50(1/60)s to 1/100,000s
	Day & Night	ICR, Auto/Color/B&W/Trigger
	Synchronization	Internal Synchronization
	Video Output	1Vp-p Composite Output (75Ω/BNC)
	S/N Ratio	More than 50dB
Lens	Zoom Ratio	Total Zoom 480X, Optical Zoom:30X, Digital Zoom:16X
	Aperture Range	F1.4, f=3.5~105mm
Menu	Min. Working Distance	10~1200mm(Wide~Tele)
	Camera ID	On/Off (OSD, 001-254, on the top right corner)
	Language	English, Chinese
	Iris	Auto/Manual
	Auto Gain	Low/High/Off
	Auto Focus	Auto/Manual/Once
	Auto White Balance	ATW1/ATW2/AC/Manual(3200K,6300K,R/G gain adjust)
	Motion Detection	On/Off (Zone, Sensitivity)
	Privacy Mask	On/Off, 8 zones
	Special Function	Optical Zoom, BLC, Y-Value, C-Value, POS/NEG, Zoom Speed (4 Levers), Definition, Mirror, Digital Noise Reduction
	Preset Points	255
	Privacy	16 areas (area/position adjustable)
General	Communication Interface	RS-485, PELCO-P/D, Baud Rate, Address, PTZ Control
	Power Supply	12VDC, ±10%
	Power Consumption	4.5W MAX
	Working Temperature	-10°C~60°C(14°F~140°F)
	Dimension	124×66×68.5mm (4.88"×2.60"×2.70")
Weight	550g(1.20lbs)	

Available Models

DS-2CZ282P, DS-2CZ282N