

## DS-7300HQHI-F4/N SERIES TURBO HD DVR

### Features and Functions

#### Appearance Design

- Typical chassis design to guarantee the low noise and environmental protection of the device
- Front slot of DVD-R/W for more convenient installation and maintenance

#### Video Input and Transmission

- Connectable to HDTVI, AHD and analog cameras
- Up to 6/10/18-ch 4 MP IP cameras input for DS-7304/7308/7316HQHI-F4/N
- Long distance transmission over UTP and coaxial cable with max. 1200m for the 720p and max. 800m for the 1080p HDTVI signal

#### Compression and Recording

- One-key enable H.264+ compression to improve encoding efficiency by up to 50% and reduce data storage costs
- Up to 3 MP resolution for recording of the first channel of DS-7304HQHI-F4/N, the first 2 channels of DS-7308HQHI-F4/N, and the first 4 channels of DS-7316HQHI-F4/N
- Supports real-time 1080p lite and when enabled, the image effect is similar with 1080p
- Supports POS triggered recording and POS information overlay

#### Video Output

- HDMI and VGA output can be configured simultaneous or independent. If simultaneous, up to 4K (3840 × 2160) resolution is supported; if independent, up to 1920 × 1080 resolution for VGA output and up to 4K (3840 × 2160) resolution for HDMI output
- Independent CVBS output improves compatibility at the most possibility and serves as the aux output or live view output only

#### Storage and Playback

- Four SATA interfaces (up to 6 TB capacity per HDD) and 1 eSATA interface
- USB 3.0 provides high-speed file transfer and backup
- 4/8/16-ch synchronous playback at up to 1080p resolution
- Smart search for efficient playback
- Supports the 3<sup>rd</sup> party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

#### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras, and 2-ch line crossing detection and intrusion detection
- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the *admin* and clear-text password available
- GUID file can be exported for password resetting and imported for finding the forgotten password
- Supports PTZ control via Omnicast VMS of Genetec protocol

#### Network & Ethernet Access


- Hik Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- One gigabit Ethernet network interface
- Output bandwidth limit configurable



## Specifications

Model		DS-7304HQHI-F4/N	DS-7308HQHI-F4/N	DS-7316HQHI-F4/N	
Video/Audio input	Video compression	H.264+/H.264			
	Analog video input	4-ch	8-ch	16-ch	
		BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection			
	HDTVI input	3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60 <b>Note:</b> The 3 MP signal input is only available for the first channel of DS-7304HQHI-F4/N, the first 2 channels of DS-7308HQHI-F4/N, and the first 4 channels of DS-7316HQHI-F4/N.			
	AHD input	1080p25, 1080p30, 720p25, 720p30			
	CVBS input	Support			
	IP video input	2-ch (up to 6-ch) Up to 4 MP resolution	2-ch (up to 10-ch)	2-ch (up to 18-ch)	
Video/Audio output	Audio compression	G.711u			
	Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)			
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480			
	HDMI/VGA output	<b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz <b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz			
	Encoding resolution	When 1080p Lite mode not enabled: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 3 MP/1080p lite/720p/VGA/WD1/4CIF/CIF			
	Frame rate	Main stream: When 1080p Lite mode not enabled: For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@12fps For 1080p stream access: 1080p/720p@12fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 3 MP/1080p lite/720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/2CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)			
	Video bit rate	32 Kbps to 6 Mbps			
	Audio output	2-ch, RCA (Linear, 1 KΩ)			
	Audio bit rate	64 Kbps			
	Dual stream	Support			
	Stream type	Video, Video & Audio			
	Synchronous playback	4-ch	8-ch	16-ch	
	Network management	Remote connections	128		
		Network protocols	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Hard disk	SATA	4 SATA interfaces			
	eSATA	Support			
	Capacity	Up to 6 TB capacity for each disk			
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (independent)			
	Network interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface			
	USB interface	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0			
	Serial interface	RS-232, RS-485 (full-duplex), Keyboard			
	Alarm in/out	16/4			
General	Power supply	100 to 240 VAC			
	Consumption (without HDD)	≤ 30 W	≤ 40 W	≤ 55 W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)			
	Working humidity	10% to 90%			
	Dimensions (W × D × H)	445 × 390 × 70 mm (17.5 × 15.4 × 2.8 inch)			
	Weight (without HDD)	≤ 5 kg (11.0 lb)			

## Physical Interfaces

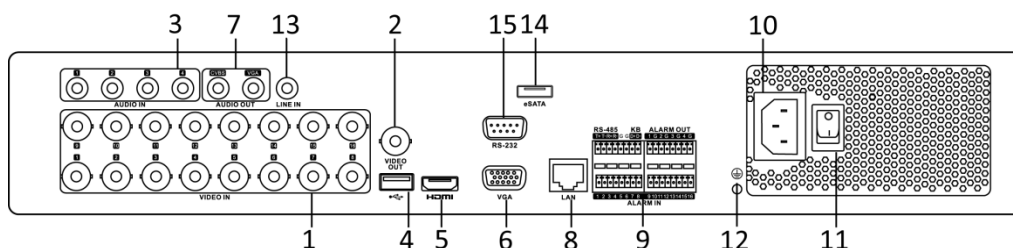

### NOTE

The rear panel of DS-7304/7308HQHI-F4/N provides 4/8 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
2	VIDEO OUT	10	100 to 240 VAC Power Input
3	AUDIO IN, RCA Connector	11	Power Switch
4	USB Interface	12	GND
5	HDMI Interface	13	LINE IN
6	VGA Interface	14	eSATA Interface
7	CVBS AUDIO OUT and VGA AUDIO OUT	15	RS-232 Serial Interface
8	LAN Network Interface		

Distributed by



## Available Models

DS-7304HQHI-F4/N, DS-7308HQHI-F4/N, DS-7316HQHI-F4/N

## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com