

DS-D5055UL 55" 4K Monitor


key Features

- Support V-BY-ONE(4K*2K) HD display;
- Adopt 3-D digital comb filter;
- Support audio output;
- True color OSD and user-friendly operation menu;
- Support DP1.2, HDMI2.0, HDMI1.4;
- Adopt 3D noise reduction technology;
- Support PIP/PBP function, and 4 division display;
- Build-in speaker 10W*2;



Model:
DS-D5055UL

Dimension:

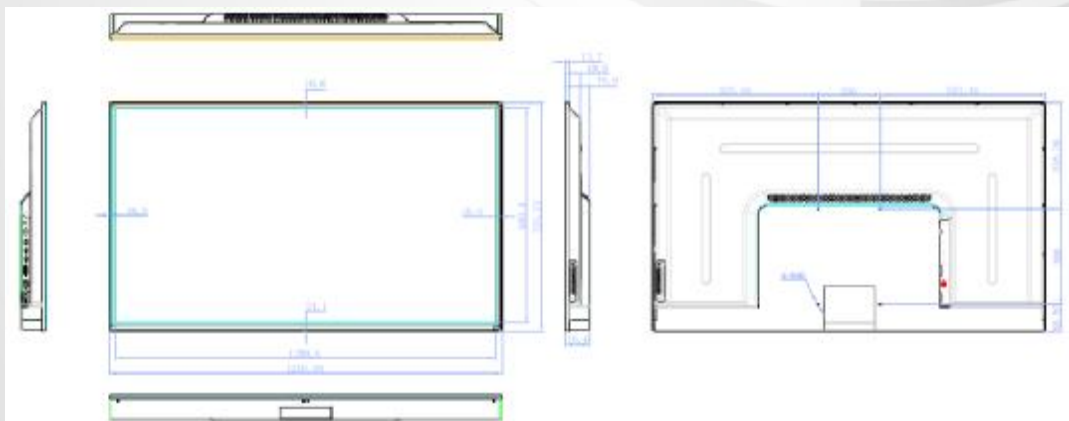

DS-D5055UL 55" 4K Monitor



Model	DS-D5055UL	
Display Type	TFT-LED Backlight	
Screen Size	54.64"	
Dot Pitch (H×V)	0.42mm*0.315mm	
Resolution	3840×2160	
Brightness	350cd/m ²	
Contrast	1200:1	
Response Time	8ms	
Color	1.07B(10bit)	
Viewable Area (H×V)	1209.6 mm×680.4mm	
Viewing Angle	Horizontal 178°, Vertical 178°	
Interfaces	VGA Input	1
	HDMI Input	2(1-ch HDMI1.4 input 3840×2160@30HZ, 1-ch HDMI2.0 input 3840×2160@60HZ)
	DP Input	1(1-ch DP1.2 input 3840×2160@60HZ)
	DVI Input	1
	PC AUDIO-IN	1
Power Supply	100 ~ 240V AC, 50/60Hz	
Power Consumption	≤ 130W(Normal working), ≤1W(Standby)	
Built-in Speaker	10W*2	
Operation Temperature	5°C ~ 40°C (41°F ~ 104°F)	
Operating Humidity	20%-80%	
Storage Temperature	-10°C ~ 55°C (14°F~ 131°F)	
Storage Humidity	10%-95%	
Dimension	1246.93mm×725.23mm×79.9mm	
Package Dimension	1385mm×825mm×163mm	
Screw Aperture	M6 200mm*300mm	
Weight	20.57 ± 1.5 Kg(Gross Weight), 14.97 ± 1.5 Kg(Net Weight)	