

EXITVIEW™

Smart Surveillance



ExitView - Identify & Apprehend

Identification & Apprehension.

A discreet and cost-effective solution for loss prevention, shrinkage and robbery. ExitView is the latest advancement from Silent Witness that combines a CCD camera with a height strip. ExitView is one of the most inexpensive solutions to tighten in-store security and will make it tougher for criminals to take advantage of you and get away with it. ExitView is a high performance CCD camera within a height strip that can be mounted on or beside the door-frame, and will capture the face of the culprit at eye-level, in full color, as they exit your premises. With visual identification, apprehension of the offender and recovery of your goods is easier than ever before.

- High performance CCD camera
- Functional height strip
- Easy to install
- Available in silver and black to blend with your decor

With ExitView, you can do more than hire a corporate security staff to protect your business. This value-priced surveillance solution is plug and play: installation is quick and easy. ExitView is ideal for retail applications, gas stations, convenience stores, malls, fast food restaurants, small businesses, banks, cashier areas, and many other commercial enterprises.

**SILENT
WITNESS®**

Securing your world

www.silentwitness.com

Toll free: 1-888-289-2288

International: 1-604-574-1523

EXITVIEW CAMERA SPECIFICATIONS

	NTSC		PAL	
Model No.	HS37N-S (silver)	HB37N-S (black)	HS37P-S (silver)	HB37P-S (black)
Imager Format	1/3" CCD		1/3" CCD	
Lens	3.7mm semi pinhole f2.0		3.7mm semi pinhole f2.0	
Field of View	66 in. H x 52 in. V		66 in. H x 52 in. V	
Number of Elements	4		4	
Video Output	1.0V P-P into 75 Ohms		1.0V P-P into 75 Ohms	
Resolution	350 TV Lines		350 TV Lines	
Light Sensitivity	0.9 lux @ f2.0		0.9 lux @ f2.0	
Electronic Iris	1/60 to 1/100,000		1/50 to 1/100,000	
S/N Ratio	51 db (AGC off)		51 db (AGC off)	
Backlight Compensation	Automatic		Automatic	
White Balance	AWB		AWB	
Input Voltage	12VDC ±10% reverse polarity protected		12VDC ±10% reverse polarity protected	
Current Consumption	150mA @12VDC		150mA @12VDC	
Operating Temperature	-20°C to +50°C (-4°F to 122°F)		-20°C to +50°C (-4°F to 122°F)	
Power Supply	12VDC Regulated class 2 transformer		N/A	
Video Cable	Use minimum type RG-59 copper clad steel core, 95% braided shield		Use minimum type RG-59 copper clad steel core, 95% braided shield	
Power Cable	Use 18 gauge stranded wire. (Do not run more than 100 feet from transformer)		Use 18 gauge stranded wire. (Do not run more than 100 feet from transformer)	
Warranty	2 years		2 years	

ENCLOSURE

Weight	1.4 lbs (0.65 kg)
Dimensions	48(W) mm x 29(H) mm x 870(L) mm 1.9 in.x1.2 in. x34.25 in.
Enclosure	Extruded Aluminum Housing (available in silver or black)
Height Strip	Scratch Coated Acrylic


ExitView's camera comes pre-focused from the factory, and includes the power supply for North American models.

For an extended field of view an optional 15° angled adapter is available.

See your dealer or contact Silent Witness.

PATENTS:

©97508 - Canada
Patent pending - USA

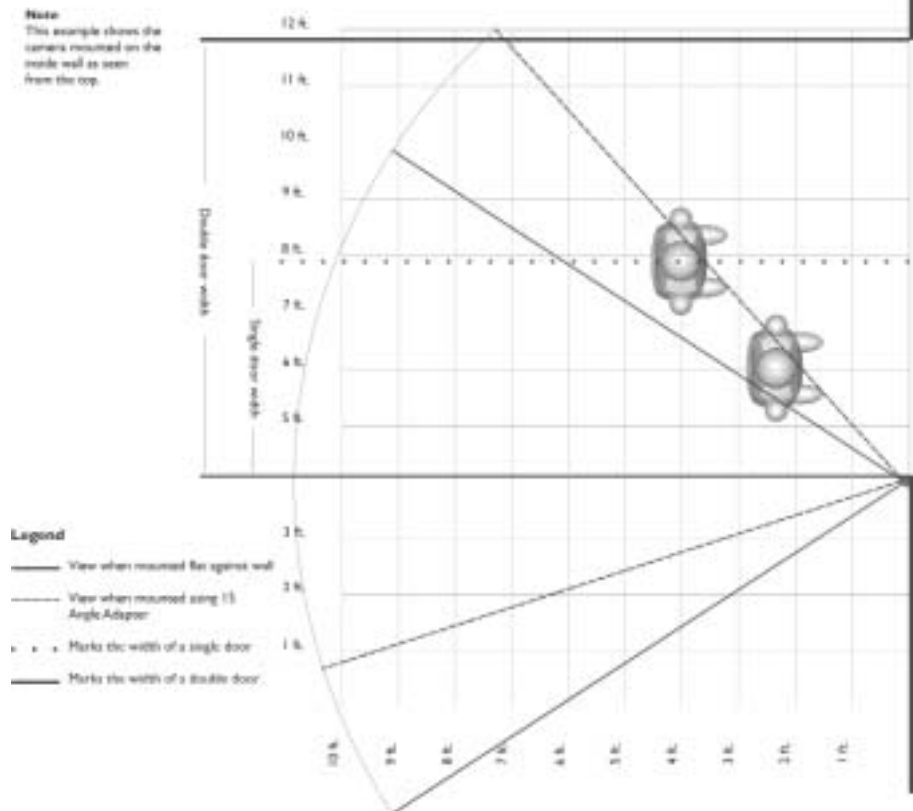

www.silentwitness.com

Toll Free: 1-888-289-2288 Int'l: 00800-2020-8080 Phone: 1(604) 574-1526 Fax: 1(604) 574-1527 Email: swsales@silentwitness.com Specifications subject to change without notice

112202