

HTR62

MOBILE VCR VIDEO RECORDER

The HTR62 is a mobile VCR video recorder that is economical without compromising features or durability. It is the ideal solution for a variety of vehicles that need to be monitored. Depending on need, two cameras can be used with the industrial grade VCR housed in a tamper resistant enclosure. The HTR62 recorder can provide up to nine hours of recording on a VHS T180 tape.

Market Opportunities

The HTR62 recorder is an excellent introductory product for companies new to the video surveillance market. With its easy-to-use interface and simple installation process, the HTR62 can be fully operational within a short period of time. The HTR62 offers versatility enabling two cameras to be utilized with an industrial grade VCR house in a tamper resistant enclosure. The HTR62 is compatible with existing Silent Witness SWS Series Systems and offers an economic solution for companies who choose to remain with the durability of an analog recorder.

Features

- Two channels of audio
- Five status inputs (e.g., brakes, stop lights, turn signals and stop arm)
- Optional GPS module records position, direction and speed
- Optional Stop Arm System allows recording of school bus stop arm violations
- Built-in speed sensor (no additional pulse divider necessary)
- Flexible mounting, vertical or horizontal
- Improved vibration resistance
- High accuracy clock with Automatic Daylight Savings Time adjustment
- All text and time can be positioned at top or bottom of screen
- Front mounted video and audio output jacks
- Easy programming with remote control included — no switches to set, no removing from platform
- Option to stop recording at the end of tape or rewind to the beginning and continue
- Activates with ignition



HTR62

Cameras compatible with the HTR62:



HTC70 Series




HTC29 Series

HTR62

SPECIFICATIONS

Recording Parameters	
Recording Format:	VHS NTSC standard
Recording Time (EP mode):	9 hours (T180 tape) 10 hours (T200 tape)
FF/Rewind Time:	Less than four minutes (T180 tape)
Continuous Recording:	On/off user selectable
Delayed-off Recording:	0 to 54 minutes, user selectable
Delayed-start Recording:	0 to 60 minutes, user selectable
Timers:	Five, independently user selectable
Text Overlay	
Title:	Up to 20 characters, user selectable
Time and Date:	Real time clock with battery backup and Automatic Daylight Saving Time, AM/PM format, three letters for month
Position:	Top or bottom of screen, independent for each value, user selectable
Speed:	Three digits, MPH or KPH
GPS (Optional):	Longitude, latitude, speed and direction, user selectable
Recorded Signals	
Number of Inputs:	Five
Text:	Three characters per signal, user selectable
Input Level:	Active high (12VDC) or active low (0VDC), user selectable
Speed Indicator	
Range:	0 to 255 MPH or KPH
Calibration Method:	Direct: drive the vehicle one mile (or one km) Indirect: enter a calibration number
Power	
Input Voltage:	12 to 14VDC
Input Power:	18 W
Power Back Up:	Saves settings for a minimum of 10 years
VCR Power Up:	Trigger signal connected to vehicle ignition or temporary power using the POWER button
Physical	
Dimensions (WxHxD):	9.75 in. x 3.75 in. x 10.25 in. (24.8 cm x 9.5 cm x 26.0 cm)
Weight:	6.7 lbs (3.02 kg)
Environmental	
Operating Temperature:	41°F to 104°F (5°C to 40°C)
Storage Temperature:	32°F to 122°F (0°C to 50°C)
Humidity:	10% to 85% RH, non-condensing

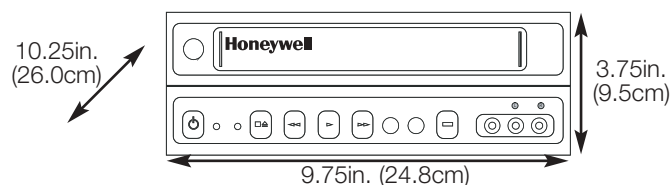

Ordering	
HTR62	Mobile VCR Video Recorder

NOTE: Honeywell reserves the right, without notification, to make changes in product design or specifications.

Honeywell Security

Honeywell Video Systems
 2700 Blankenbaker Pkwy, Suite 150
 Louisville, KY 40299
 800.796.CCTV
 www.honeywell.com

AV05070
 L/HTR62/D0
 October 2005
 ©2005 Honeywell International Inc.