

2MP Indoor IR Fixed Dome Camera

TC-D1212R


- Full HD (1080p) resolution
- Fixed-focal Lens (f=3.6mm)
- Day&Night (ICR)
- WDR (Wide Dynamic Range: 15fps)
- Motion Detection
- De-fog
- HSBLC
- Coaxial OSD Control



SPECIFICATIONS

VIDEO	
Image Sensor	1/2.8" SONY 2Mega Exmor CMOS Sensor
Effective pixels	1984(H) X 1105(V), 2.19M Pixels
Total pixels	2000(H) X 1121(V), 2.24M Pixels
Max. Resolution	1920 X 1080
Scanning Mode	Progressive Scan
Lens Type	Fixed-focal
Focal Length	f = 3.6mm
IRIS Control	Fixed Iris
Angular Field of View	92.6°(H), 54.6°(V), 120.0°(D)
Pan/Tilt Range	Pan : 0° ~ 340° Tilt : 7° ~ 90°
Min. illumination	COLOR : 0.3 Lux @ F1.2 B/W : 0 Lux (IR LED ON)
S/N Ratio	More than 50dB
Electronic Shutter Speed	AUTO / Manual(1/30,1/25Sec ~ 1/30000Sec) / FLICKER
Day/Night	YES(ICR)
IR DISTANCE (LEDs)	10m (18ea)
Video Out	1 HD BNC , 1 SD BNC
FUNCTION	
AGC	0 ~ 20 Level Adjustable
Brightness	0 ~ 20 Level Adjustable
Sens-UP	OFF / x2 ~ x32
WDR(Wide Dynamic Range)	OFF / ON (Low,Middle,High / 15 Frame)
Backlight Compensation(BLC)	OFF/ON
HSBLC	1 ~ 20 Level Adjustable
ACE(D-WDR/ATR-EX)	OFF/LOW/MIDDLE/HIGH
Motion Detection	OFF/ON (4 Zone)
Privacy Masking	OFF/ON (16 Zone)
Day & Night	Auto(AGC)/Day/Night/Ext
Smart -IR(IR OPTIMIZER)	0~15 Level Adjustable
White Balance	ATW(1,700K ~ 11,000K) / AWC--Set / Manual /AWB
Digital Noise Reduction	2D, 3DNR
Mirror	MIRROR,V-FLIP
D-ZOOM(EZOOM)	OFF/ON (x2 ~ x8)
Sharpness	0~15 Level Adjustable
De-fog	OFF/ON
GAMMA Correction	r = 0.45 ~ 0.65
Lens Shading(LSC)	OFF/ON
ENVIRONMENTAL	
Out-door Ready	-
Storage Temperature	-20°C~ +60°C(-4°F~ +140°F) (Humidity : 0% ~ 95%)
Operating Temperature	-10°C~ +50°C(14°F~ +122°F) (Humidity : 0% ~ 90%)
ELECTRICAL	
Power Source	12VDC, 24VAC
Power Consumption	4.56W
MECHANICAL	
Dimensions (W x H x D)	Ø100mm x 80mm (Ø3.94" x 3.15")

DIMENSIONS

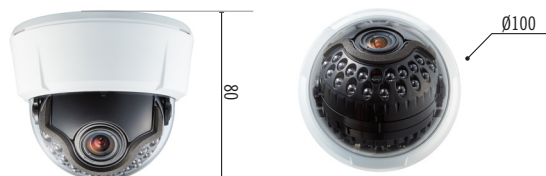

ACCESSORIES(OPTIONAL)



DA-WM2150

ACCESSORIES CONFIGURATION TREE



Wall Mount
(DA-WM2150)