


KD-CB90TDN (Anti Vandal Dome Camera) | DOME CAMERAS



■ Outward Appearance

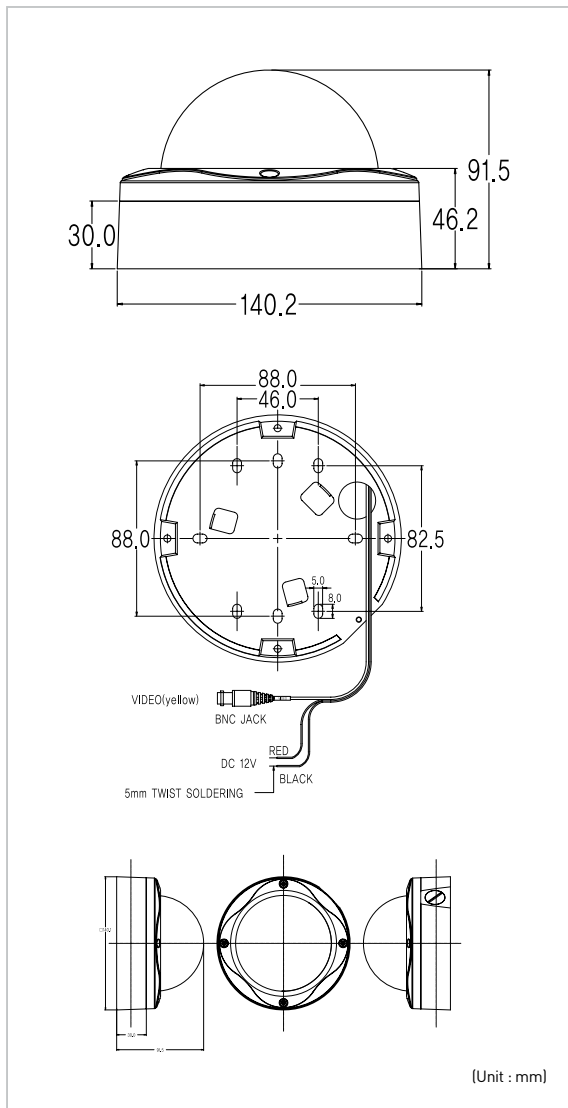

■ Features

- 1/3" Interline Double Speed CCD
- Waterproof / Anti Vandal Dome Camera
- Easy control angle 3D Lens bracket
- S/N Ratio 46dB and over
- Dip Switch Control
- True Day & Night [Optional]
- Varifocal Lens Mount : 4~9mm (Optional: 2.8~10mm, 9~22mm)
- Easy installation by camera ceiling bracket

■ Specifications

General Spec	KD-CB90TDN	
	NTSC	PAL
CCD Type	1/3" Interline Double Speed CCD	
Total No. Pixels	811(H) × 508(V)	795(H) × 596(V)
Scanning System	525Lines	625Lines
Horizontal Resolution	480 TV Lines[COLOR], 560 TV Lines[B/W]	
Sensitivity to Light	0.4 Lux with F1.2 Lens	
Gamma Correction	0.45	
Shutter Speed	1/60~1/100,000	1/50~1/100,000
Synchronization	Internal	
S/N Ratio	0.46dB Ove	
Video Output	1.0Vp~p/75 Ohm Composite	
Lens Mount	DC Type f=4~9mm	
Video Output	Video Output	BNC
	Power	DC Jack
Operating Temperature	-10°C ~ +55°C (Air Humidity Max 85%)	
Voltage	12V/DC	
Power Consumption	Max 2.1(W)	
Dimension	140.2(∅) × 91.5(H)mm	
Weight	1,700g(Without Lens)	