


NUUO NDVR Specification

NUUO Hybrid System/ 2009.6.25

SCB-G3-3000 Series

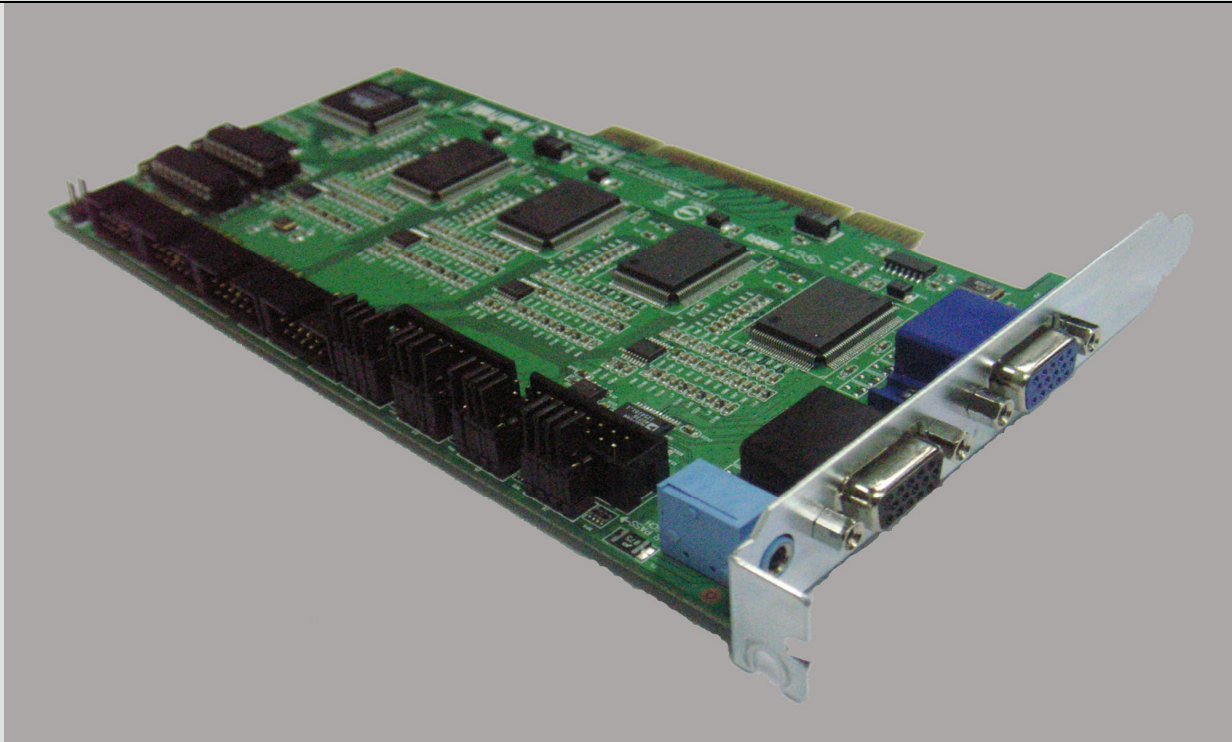

Specifications

Model	SCB-3004	SCB-3008	SCB-3012	SCB-3016
Video Input	4 Cameras	8 Cameras	12 Cameras	16 Cameras
Audio Input	4 Channels			
Maximum Cards	2 Cards*			
Display Rate @D1	120 fps (NTSC), 100 fps (PAL)			
Recording Rate @CIF	120 fps (NTSC), 100 fps (PAL)			
Recording Rate @D1	120 fps (NTSC), 100 fps (PAL)			
Video Resolution	NTSC : 704x480 ; 640 x 480; 352x240 PAL : 704x576 ; 640 x 576; 352x288			
Compression Format	Software Compression MPEG-4			
Available I/O Card	4 Cards			
Hardware Watchdog	Yes			
Dimension	200 (W) x 120 (H) mm			
Software Version	NUUO MPEG-4 Hybrid system v3.1.15			
System Minimum Requirements				
OS Supported	Windows 2000 / Windows XP / Windows 2003 / Windows Vista			
CPU	Pentium 4 – 2.8 GHz			
RAM	512 MB			
HDD	80 GB			
Mother-board	Intel 945 or 965 chip, Intel Chipset and ASUS motherboard recommended			
Display	ATI Radeon 9200, nVIDIA GeForce FX-5200, Intel 945 / 965, or above (ATI recommended)			
Support Language				
Chinese (Simplified)	Chinese (Traditional)	Czech	Danish	
English	Farsi	Finnish	French	
German	Greek	Hebrew	Hungarian	
Italian	Japanese	Korean	Portuguese(Brazil)	
Portuguese(Portugal)	Russian	Slovak	Spanish	
Thai	Turkey			

* When installed two 3000 series card on one PC, the system can only support 352x240(NTSC), 352x288(PAL) resolution for each channels.