



Model NV-1662 16-Channel Active Receiver Distribution Amplifier Hub



Front



Rear



RJ45A Adaptors
Included

Features:

- Compact rack mountable 19" 1U high enclosure features 16 channels with 2 outputs per channel
- Full-motion CCTV video at distances up to 3,000ft (1km) when used with any passive NVT transceiver or hub; 1 mile (1,6km) when used with NV-653T active transmitter
- RJ45 connectivity with optional NV-RJ45A RJ45-to-screw terminal adaptors (included)
- Exceptional interference rejection
- Built-in transient protection and ground lifting
- Built-in sharpness and brightness controls; Green Active LED for each port
- Compatible with qualified UTP cameras
- Includes sixteen 2ft (60cm) coax jumper cables, rackmount hardware and four NV-RJ45A adaptors
- Limited lifetime warranty

The NVT Model NV-1662 is a 16-channel active (amplified) distribution amplifier device that allows the transmission of real-time monochrome or color video on up to one mile (1,6km) using Category Unshielded Twisted-Pair (UTP) wire.

The 16 channel distribution amplifier hub features dual outputs per channel for large high-density applications. 1U rack-mountable active receiver distribution amplifier hubs provide signal conditioning in the form of ground-lifting, distance EQ, and transient protection.

The unparalleled interference rejection and low emissions allow long run video signals to co-exist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of shared or existing cable plant. Ground-lifting ensures no annoying "hum-bars" when ground potential differences exist. With built-in transient protection, damaging voltage spike problems are eliminated. Perfect for larger CCTV installations where port density and camera number growth are prevalent.

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
(+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
nvt.com • info@nvt.com



Model NV-1662

16-Channel Active Receiver Distribution Amplifier Hub

Technical Specifications

VIDEO

Frequency response	DC to 5 MHz
Common-mode / Differential-mode rejection	
15 KHz to 5 MHz	60 dB typ
Impedance	
Coax, female BNC	75 ohms
UTP, Screw terminal block or RJ45	100 ohms



- 1 Ch. 2, 6, 10, 14
- 2 Ch. 1, 5, 9, 13
- 3 Ch. 3, 7, 11, 15
- 4 Ch. 4, 8, 12, 16

WIRE TYPE

Network Wiring	One Unshielded Twisted Pair
	24-16 AWG (0,5-1,31mm)
Category Type	2 or better
Impedance	100 ± 20 ohms
DC Loop Resistance	52 ohms per 1,000ft (18 ohms per 100m)
Differential Capacitance	19 pF/ft max (62 pF/m max)

POWER

115/230V, built-in, 50/60Hz	160 mA	35 watts	125 BTU/hour
Power inlet		IEC with molded power cord (included)	
Protection		5x20mm type T fuse 160mA 250V	

ENVIRONMENTAL

Ambient temperature	+32 to +122 °F (0 to +50 °C)
Minimum airflow	4 ft ³ /min (0,1m ³ /min)
Humidity (non-condensing)	0 to 95%
Transient Immunity	per ANSI / IEEE 587 C62.41

MECHANICAL

Dimensions, excluding brackets and connectors	
Weight	5.5lb (2,5kg)
Dimensions	17in wide, 1.7in high, 8.125in deep 43cm wide, 4,3cm high, 20cm deep


ACCESSORIES (Included)

Mounting	Rack mount "L" brackets for front, rear, or wall installations; rubber feet for desk applications
Cables	Sixteen 2ft (60cm) coax jumpers
NV-RJ45A	Molded IEC power inlet cord 7ft (200cm) Four NV-RJ45A RJ45-to-screw-terminal


Specifications subject to change without notice.

Typical Applications

Passive to Active Application up to 3,000ft (1km)

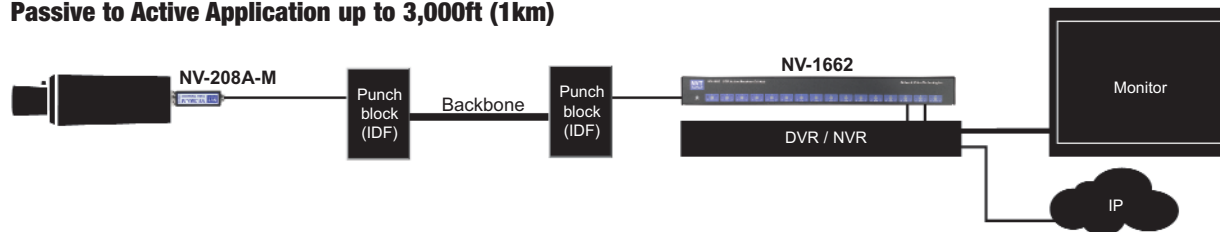

Active to Active Application up to 1 mile (1,6km)

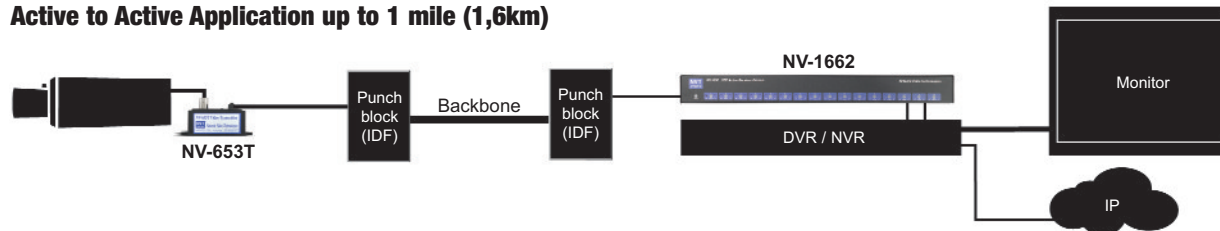

Network Video Technologies

4005 Bohannon Drive • Menlo Park, CA 94025 • USA
 (+1) 650.462.8100 • 800.959.9870 • FAX (+1) 650.326.1940
 nvt.com • info@nvt.com

Copyright © 2008 NVT, Inc.
411-662-1-N