

Super High-Resolution DayNight Camera

SCC-B2333/B2033


NEW



Features

- 1/3" SONY 410K/470K Pixels Super-HAD IT CCD
- High Resolution : 600 TV Lines
- Min. illumination
0.0002Lux (F1.2, 15 IRE, Sens-Up 512x, Color)
0.00002Lux (F1.2, 15 IRE, Sens-Up 512x, B/W)
- Internal/Linelock (Phase Control) Function
- ALC(Video/DC) / ELC
- Day/Night Function (ICR), Sens-Up Function (512x)
- Motion Adaptive Digital Noise Reduction (3D+2D)
- Back Light Compensation (Area Setting)
- Advanced Motion Detection Function
- eXtended Dynamic Range (XDR)
- Privacy Mask Function (Polygonal Mosaic)
- High Shutter Speed Control by External Trigger
- DIS (Digital Image Stabilization)
- CCVC (Camera Control Via Coaxial cable, Controller : SCX-RD100)
- RS-485(Half) Control (Multi-Protocol support)
- Multi-Language OSD support
- Intelligent Video (Moved / Fixed / Fence / Area / Tracking)
- C/CS Lens Mount Compatible
- SCC-B2333 : DC12V & AC24V 60Hz(50Hz)
SCC-B2033 : AC220V(50Hz)

Dimensions (unit:mm)

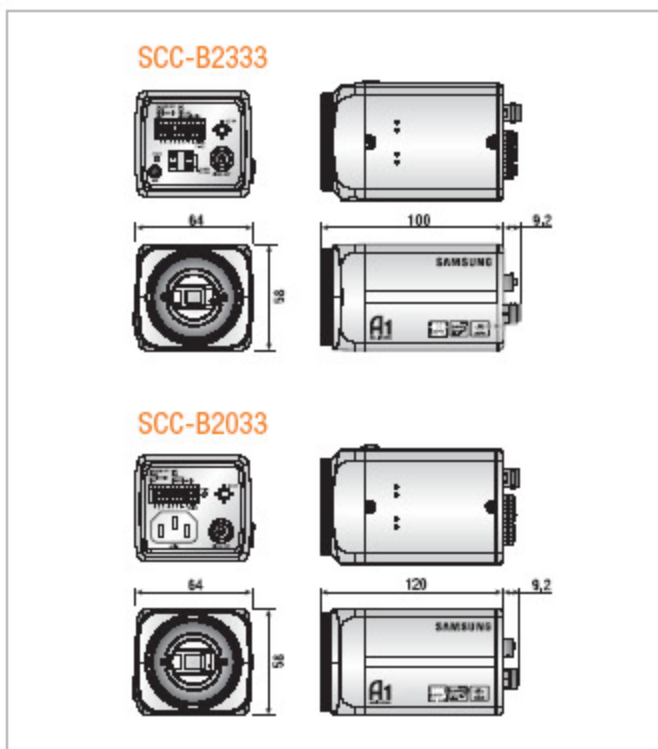

Specifications

Model	SCC-B2333N	SCC-B2033P/B2333P	
Camera Type	Color/BW	Color	
Image	Device	1/3" Super-HAD IT CCD	
	Pixels	Effective	768 x 494
Scanning	System	Interlace	
	Horizontal	Internal Mode	15,734 Hz
		Line-lock Mode	15,750 Hz
	Vertical	Internal Mode	59.94 Hz
Line-lock Mode		60 Hz	
Resolution	Horizontal	600 TV Lines	
Min. Scene Illumination	Color	Sens-up off	0.12Lux(15IRE), 0.2Lux(30IRE), 0.4Lux(50IRE)@F1.2
		Sens-up	0.0002Lux(15IRE), 0.0005Lux(30IRE), 0.0008Lux(50IRE)@F1.2
	B/W	Sens-up off	0.012Lux(15IRE), 0.02Lux(30IRE), 0.04Lux(50IRE)@F1.2
		Sens-up	0.00002Lux(15IRE), 0.00005Lux(30IRE), 0.00008Lux(50IRE)@F1.2
Functions	Number of Privacy Zone	12 (Polygonal Method)	
	Day/Night	Day/Night/AUTO/EXT (ICR)	
	Motion Detection	Off/On	
	D-Zoom	1x ~ 16x (0.1x STEP)	
	High Speed Shutter	1/60~1/10Ksec(OSD/External Control)	
	Sens Up	2x ~ 512x	
	BLC	Off/On	
	AGC	Off/On	
	ELC	Off/On (~1/200Ksec)	
	Line Lock	Off/On (Phase Control)	
	Camera ID	Off/On (Max.54ea/2Line)	
	White Balance	ATW1/ATW2/AWC/3200K/5600K	
	eXtended Dynamic Range	Off/Low/Mid/High	
	Digital Noise Reduction	Off/On	
	Digital Image Stabilization	Off/On	
Intelligent Video	Off/On(Moved / Fixed / Fence / Area / Tracking)		
PIP	Off/On		
Etc. Function	Detail, Reverse(H/V), Posi/Neg		
Video Output	VBS 1.0Vp-p	VBS 1.0VpN/Ap	
S/N Ratio	S/N Ratio	52 dB	
Lens	Lens Drive Type / Mount Type	MANUAL/AI(VIDEO/DC) / CS/C	
OSD		Yes	
Alarm	Output	1 ea	
Remote Control	CCVC	Yes (with SCX-RD100)	
Environmental	Operating Temperature	Absolute : -20°C ~ +60°C / Sustained : -10°C ~ +50°C	
Conditions	Operating Humidity	Less than 90%	
Power	Power Requirement	24 VAC ±10%/12 VDC ±10%	
		SCC-B2333P:24 VAC ±10%/12 VDC ±10% SCC-B2033P:AC220V~240V (50Hz±0.3Hz)	
	LED Indicator	Yes	
Physical Specification	Dimensions (WxHxD)	64 x 58 x 109.2 mm	
		SCC-B2333P:64x58x109.2 mm SCC-B2033P:64x58x129.2 mm	
	Weight	305 g	
	Color	Body	
		Silver	