

# Super High-Resolution DayNight Mini Dome Camera


## SCC-B5223 NEW



### Features

- 1/3" SONY 410K/470K Pixels Super-HAD CCD
- High Resolution : 600 TV Lines
- Min. Illumination 0.06 Lux (F2.0, 15 IRE, Sens-Up x4, Color)
- f=3.0 mm, Fixed Iris Lens
- Day Night Function (Soft), Sens-Up Function (x4)
- Motion Adaptive Digital Noise Reduction (3D+2D)
- eXtended Dynamic Range (XDR)
- CCVC (Camera Control Via Coaxial cable, Controller : SCX-RD100)
- Electronic Level Control (Manual Lens)
- Auto White Balance (ATW/AWC)
- Mini Compact Size
- DC12V

### Dimensions (unit:mm)

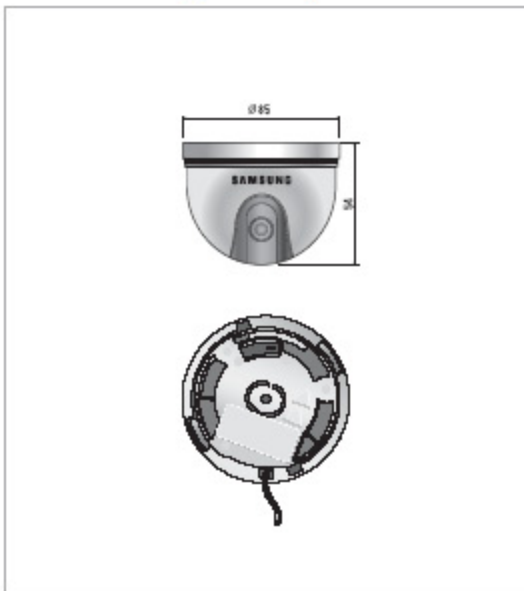

### Specifications

Model		SCC-B5223N	SCC-B5223P	
Camera Type	Color/BW	Color		
Image	Device	1/3" Super-HAD IT CCD		
	Pixels	Effective	768 x 494	752 x 582
Scanning	System		Interface	
	Horizontal Frequency	Internal Mode	15,734 Hz	15,625 Hz
		Line-lock Mode	15,750 Hz	15,625 Hz
	Vertical Frequency	Internal Mode	59.94 Hz	50 Hz
Line-lock Mode		60 Hz	50 Hz	
Min. Scene Illumination	Sens-up off	0.3Lux(15IRE), 0.6Lux(30IRE), 1.0Lux(50IRE) @F2.0		
	Sens-up	0.075Lux(15IRE), 0.15Lux(30IRE), 0.25Lux(50IRE) @F2.0		
Functions	Sens Up	Auto 4x		
	BLC	Auto		
	AGC	Auto		
	ELC	On (~ 1/200Ksec)		
	White Balance	ATW/AWC		
	Digital Noise Reduction	Auto		
	Resolution	Horizontal	600 TV Lines	
Video Output	VBS 1.0Vp-p	VBS 1.0VpN/Ap		
S/N Ratio		52 dB		
Lens	Focal Length	3.0 mm		
	Aperature Ratio	F2.0		
	Viewing Angle	Wide	92°(H) x 72°(V)	
	Lens Drive Type / Mount Type	MANUAL / Board Type		
Remote	CCVC	Yes (with SCX-RD100)		
Environmental Conditions	Operating Temperature	Absolute : -10°C ~ +50°C / Sustained : -20°C ~ +60°C		
	Operating Humidity	Less than 90%		
Power	Power Requirement	12 VDC ± 10%		
Physical	Dimensions (WxHxD)	85(ø) x 54(H) mm		
Specification	Weight	120 g		
	Color	Body	Silver	