

2.4 GHz

T-2400 Omni-Directional Series


The T-2400 multi-channel series is the smallest and most versatile transmitter of it's kind on the market today. With standard features including four user selectable channels, audio line level and alarm input, the multi-channel series is perfectly suited for building into custom mini camera housings and in applications where only battery use is possible.



ADVANTAGES

- Four user selectable channels
- Easy to use – “Plug & Play”
- Standard features include audio line level and alarm input
- Eliminates the need for cabling or trenching
- Outperforms 900MHz for use with color or high resolution cameras
- Outperforms 900MHz for outdoor long range transmission
- Video Transmitter and Receiver included
- One Year Limited Warranty



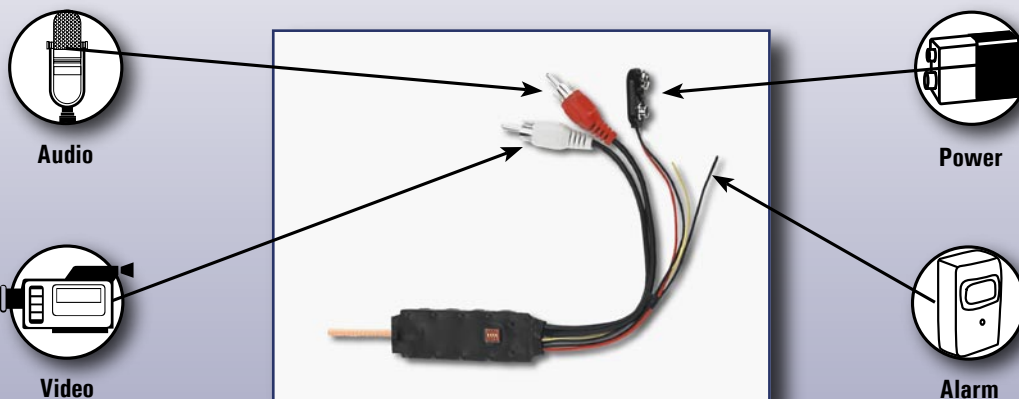

SPECIFICATIONS	T-2445X	T-2485X
Operating Frequency (4 Channels)	2.4108 – 2.4728 GHz	2.4108 – 2.4728 GHz
Radiated Power	50 mV/m @ 3m	80mW
Range (line-of-sight)	900 Feet	1700 Feet
With optional 14dB Rx Antenna	1 mile	2.5 miles
Antenna Type	Omni Directional Transmitter & Receiver	
Video Format	NTSC or PAL	
Video Connector	RCA male @ 75 OHMS– 1 Volt P-P	
Audio Connector	RCA male @ 600 OHMS– 1 Volt P-P	
Alarm Input Connector	Bare leads – Norm Closed	
Temperature Range	-30°F – 170°F	
Power Supply Included	8 – 14 VDC – Polarity Protected	
Current Consumption:	Transmitter: 45 mA @ 12VDC Receiver: 350 mA @ 12 VDC	95 mA @ 12VDC 350 mA @ 12 VDC
Dimensions	Transmitter: 1" x 2.5" x 0.25"	Receiver: 4.5" x 7.25" x 2.0"
Weight	37g or 1.3oz	37g or 1.3oz
FCC / IC Approved	YES	N/A

KIT INCLUDES

- Mini Video Transmitter
- Wireless Video Receiver
- Two 12 VDC power supplies
- Rubber Duck Antenna
- AA battery pack holder
- RCA Video Cables
- One Year Limited Warranty

