

MAIN FEATURES

Microprocessor controlled

LCD display back-lit

1 RS485 communication channel

Ergonomic design

DESCRIPTION

This microprocessor controlled keyboard allows you to interface and control SM42B-SM82B, SM84B-SM164B and SM328B matrix.

The operator can set up and control the SM42B-SM82B, SM84B-SM164B and SM328B matrix through the On Screen Display.


A LCD display assists the operator during all the control functions.

One serial RS485 communication line for the video matrix.


A RS232 serial connection allows the firmware update from a PC.



DCK

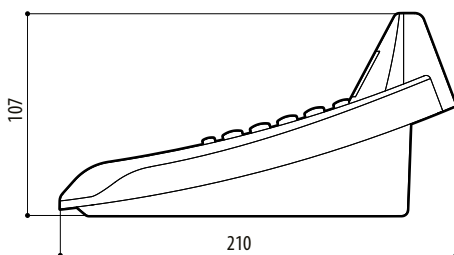

DCK

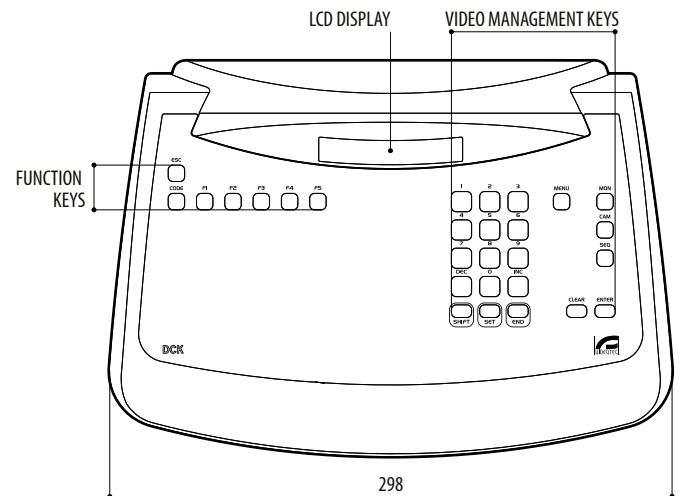

mm 1:4

TECHNICAL DATA

GENERAL

Backlit display
 Ergonomic keys configuration
 Menu in 4 languages (Italian, English, French and German)
 Three password levels: connection, set-up, alarm reset
 Macro-functions keys (max 10): monitor selection, selection of camera on active monitor
 9999 cameras, 99 monitors
 Alarm and/or break communication buzzer
 Various accessory functions like keys enabling/disabling, energy saving, error alert, etc.
 Supplied with instruction manual, wide range power supply, 3 power cables, 2 RJ11 telephone cables, 2 jack shunt boxes RJ11

MECHANICAL

Thermo resistant and shock proof ABS plastic material
 Rubber keys
 Dimensions: 298x107x210mm (11.7x4.2x8.2in)
 Display 4 lines of 20 characters
 1 connector RJ11
 Power supply jack connector
 DB9 connector for firmware update
 Configuration Dip-Switch

ELECTRICAL

Power supply
 • IN 100-240Vac - OUT 12Vdc, 47/63Hz, 1A

PROTOCOLS

Video Line
 • VIDEOTECH (1200, 9600, 19200, 38400 baudrate)
 • MACRO (1200, 9600, 19200, 38400 baudrate)

COMMUNICATIONS

One RS485 line for communication:
 • one direct line for communication with matrix and multiplexer to maximum 1200m (3937ft)
 Serial connection RS232 to PC for firmware update, controllable to a maximum distance of 15m (49ft)

INTERFACE WITH OTHER PRODUCTS

Multiplexer

- ADEMCO
- ENEO
- HITRON
- SANYO
- SONY

DVR

- EL.MO.
- EVERFOCUS
- SONY

ADEMCO, EL.MO., EVERFOCUS, HITRON, SANYO, SONY are registered trademarks. Because DCK may be interfaced with equipment not manufactured by VIDEOTECH, it is possible that the interface protocols have changed or are in a different configuration from earlier tested units from us. Because VIDEOTECH recommends a bench test prior to installation, VIDEOTECH will not be liable for any installation costs or lost revenues in the event a compatibility problem will occur.

ENVIRONMENT

Indoor
 Operating temperature: 0°C / +40°C (+32°F / +104°F)

CERTIFICATIONS

CE EN61000-6-3, EN60950-1, EN55022 Class B, EN50130-4


FCC Part. 15 Class B

M42B-SM82B Matrix 4/8 inputs and 2 outputs

SM84B-SM164B Matrix 8/16 inputs and 4 outputs

SM328B Matrix 32 inputs and 8 outputs

Retrofit on discontinued products: contact VIDEOTECH for further specifications.

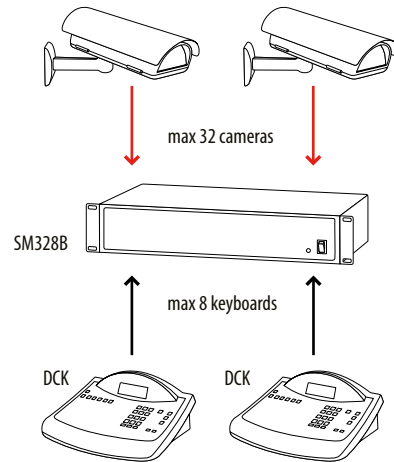

PACKAGE

Code	Unit weight		Package weight		Package dimensions (WxHxL)		Master carton unit
	kg	lb	kg	lb	cm	in	
DCK	1.0	2.2	3.1	6.8	42.3x17.2x26.2	16.6x6.7x10.3	4