

# MAXIMUS MPX

## EX-PROOF PTZ DAY/NIGHT CAMERA



### FEATURES

Electropolished AISI 316L stainless steel explosion proof PTZ camera unit

¾" NPT threaded hole for use of cable glands or conduit

Variable speed: 0.1°-100°/s Pan and Tilt

Extremely easy electrical connections directly into the unit, thanks to the explosion-proof inspection box

Day/Night camera:

- True Progressive Scan
- High resolution: up to 550 TVLines
- Advanced image stabilizer (Stable Zoom Mode)
- Day/Night (Auto ICR: automatic removal of IR filter)

Up to 2 simultaneous video streams

Position accuracy: 0.02°

Integrated wiper

### OPTIONS:

IP based control, H.264/AVC and JPEG, 25fps, Full D1 (compatible with ONVIF protocol, Profile S)

Prewired certified versions with unarmored cable/barrier cable gland (except for UL versions)

### DESCRIPTION

The MAXIMUS ex-proof PTZ cameras ensure excellent performance for monitoring critical processes in areas with risk of explosion, such as refineries, gas pipelines, oil tankers, offshore platforms, industrial processes, chemical industries, etc.

The area is always monitored, thanks to the speed and detection accuracy of the target.

Made of AISI316L stainless steel, which is excellently resistant to UV rays, salt mist and air pollution.

All models are available in analog or IP version.

The flexible operator control of pan/tilt/zoom functions allows the video transmission over the local area network (LAN) or over the Internet with the H.264/AVC compression, compatible with ONVIF Profile S.

The versions certified ATEX / IECEx / EAC / INMETRO / CNEx are available with optional prewired unarmored cable/barrier cable gland (IEC/EN 60079-14).

(Ref. ACCESSORIES: MPXCABL4, 4m, and MPXCABL10, 10m)



MPX



CABLE INPUT



**TECHNICAL DATA****GENERAL**

AISI 316L stainless steel construction  
 Passivated and electropolished external surfaces  
 Quick configuration and setup  
 Dynamic positioning control system

**MECHANICAL**

1 3/4" NPT hole for cable glands  
 Zero backlash  
 Horizontal rotation: 360° continuous  
 Vertical rotation: -90° to +90°  
 Horizontal speed (variable): from 0.1° to 100°/s  
 Tilt speed (variable): from 0.1° to 100°/s  
 Preset accuracy: 0.02°  
 12mm thick tempered glass window  
 Integrated wiper  
 Unit weight: 27kg (60lb)

**ELECTRICAL**

Power supply/Current consumption:

- 230Vac, 0.5A, 50/60Hz
- 24Vac, 5A, 50/60Hz
- 120Vac, 1A, 50/60Hz

Power consumption:

- 120W max

1 video output 75 Ohm 1Vpp (PAL/NTSC)

Functions: Autopan, Preset, Patrol, Tour (maximum 3), Autoflip

Maximum number of presets for protocol

- VIDEOTECH MACRO: 250
- ERNITEC: 250
- PANASONIC: 250
- PELCO D: 99
- AMERICAN DYNAMICS: 95

16-character string for zone and preset titling

I/O alarm card:

- 5 alarm inputs
- 2 relay outputs (1A 30Vac/60Vdc max)

**COMMUNICATIONS**

Configuration through OSD

2 half-duplex serial RS-485 interfaces or full-duplex RS-422

Firmware updating from console in remote mode (only VIDEOTECH MACRO and PELCO D protocols)

Up to 999 units, addressable by means of dip-switches

MPX, IP based control mode:

- Connection Ethernet port LAN 10/100T

Optical connector: ST (standard)

IP MPEG4 control mode:

- Compression MPEG-4/MJPEG
- Image resolution: Full D1 (720x576), VGA (640x480), CIF (352x288)
- Image frame rate max 25fps at Full D1
- Web Server

IP based control mode, H.264/AVC:

- Compression H.264/AVC and JPEG
- Two independent video streams
- Image resolution: from Full D1 (720x576 for PAL, 720x480 for NTSC) to 352x240 in 18 steps
- Web Server
- Compatible with ONVIF protocol, Profile S

**PROTOCOLS**

Serial communication protocol: AMERICAN DYNAMICS, ERNITEC, PANASONIC, PELCO D, VIDEOTECH MACRO

**ENVIRONMENT**

Indoor/Outdoor

Operating temperature: -40°C (-40°F)/+60°C (140°F)

Surge immunity: up to 2kV line to line, up to 4kV line to earth (Class 4)

**CERTIFICATIONS**

ATEX (EN 60079-0: 2012, EN 60079-1: 2007, EN 60079-31: 2009):

⊕ II 2 G Ex d IIC T<sub>6</sub> T<sub>a</sub> -40°C to +60°C Gb

⊕ II 2 D Ex tb IIIC T<sub>85</sub>°C T<sub>a</sub> -40°C to +60°C Db

IP66

IECEx (IEC 60079-0: 2011, IEC 60079-1: 2007, IEC 60079-31: 2008):

Ex d IIC T<sub>6</sub> T<sub>a</sub> -40°C to +60°C Gb

Ex tb IIIC T<sub>85</sub>°C T<sub>a</sub> -40°C to +60°C Db

IP66

EAC EX:

Ex d IIC T<sub>6</sub> Gb X

Ex tb IIIC T<sub>85</sub> Db X

CNEx (IP versions only with encoder MPEG4 - MPX...X000A):

Ex d IIC T<sub>6</sub> Gb Tamb-40~60°C

DIP A21 TA T<sub>6</sub> Tamb-40~60°C

INMETRO:

Ex d IIC T<sub>6</sub> Gb Ta -40°C a/to +60°C

Ex tb IIIC T<sub>85</sub>°C Db Ta -40°C a/to +60°C

IP66

cULus Listed, TYPE 4X

UL listed for USA (only for 24Vac version):

Class I, Zone 1, AEx d IIC T<sub>6</sub>

Zone 21, AEx tb IIIC T<sub>85</sub>°C

UL listed for Canada (only for 24Vac version):

Class I, Zone 1, Ex d IIC T<sub>6</sub> Gb

Class II, Groups E, F and G

**BRACKETS AND ADAPTORS**

MPXWBA	AISI 316L stainless steel wall bracket
MPXCW	AISI 316L stainless steel corner adapter module
MPXCOL	AISI 316L stainless steel pole adapter module
MPXWBTA	AISI 316L stainless steel parapet or ceiling mounting bracket

**ACCESSORIES**

WASEX2T4AT	Tank 10l with integrated manual pump controlled by ATEX certified solenoid valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc
WASEX2T4GOR	Tank 10l with integrated manual pump controlled by EAC certified solenoid valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc
WASEX2T4IN	Tank 10l with integrated manual pump controlled by INMETRO certified solenoid valve, delivery head up to 20m (66ft) max, IN 24Vac/Vdc

OCTEX3/4C	Cable gland with gasket EX 3/4" NPT, unarmoured cable IECEX-ATEX-EAC
OCTEXA3/4C	Cable gland with gasket EX 3/4" NPT, armoured cable IECEX-ATEX-EAC
OCTEXB3/4C	Barrier cable gland 3/4" NPT, unarmoured cable IECEX-ATEX--EAC
OCTEXBA3/4C	Barrier cable gland 3/4" NPT, armoured cable IECEX-ATEX-EAC
OCTEX3/4	Cable gland with gasket EX 3/4" NPT, unarmoured cable ATEX
OCTEXA3/4	Cable gland with gasket EX 3/4" NPT, armoured cable ATEX
MPXCABL4	Cabling for MPX/MPXT, 4m (157.5in) (unarmoured cable and barrier cable gland): 2 ethernet cables, 3 power supply wires, 2 coaxial video cables, 15 wires for relays alarms and telemetry
MPXCABL10	Cabling for MPX/MPXT, 10m (394in) (unarmoured cable and barrier cable gland): 2 ethernet cables, 3 power supply wires, 2 coaxial video cables, 15 wires for relays alarms and telemetry

**PACKAGE**

Model Number	Weight	Dimensions (WxHxL)	Master carton
MPX1QVW000A	30.4kg	54x31x49cm	-

**MAXIMUS MPX - CONFIGURATION OPTIONS**

	Voltage	Day/Night camera				Video Output	
<b>MPX</b>	<b>1</b> 230Vac	<b>P</b> Day/Night camera 36x optical zoom lens, PAL	<b>V</b> With alarm board	<b>W</b> With wiper	<b>0</b>	<b>0</b> Analog control	<b>00A</b>
	<b>2</b> 24Vac	<b>Q</b> Day/Night camera 28x optical zoom lens, PAL				<b>X</b> IP MPEG4 control <sup>1</sup>	
	<b>3</b> 120Vac	<b>N</b> Day/Night camera 36x optical zoom lens, NTSC				<b>Z</b> IP H.264/AVC, Protocol ONVIF Profile S	
		<b>M</b> Day/Night camera 28x optical zoom lens, NTSC					

<sup>1</sup> the CNex IP versions only with encoder MPEG4 - MPX...X000A




**3/4" NPT CABLE GLAND SELECTION LAYOUT**

Zone, Gas	Cable gland type	Certification	Operating temperature	Cable	Cable glands part code	Diameter of the external cable	Under armor cable diameter
IIC, Zone 1 or Zone 2 IIB or IIA, Zone 1	Barrier	IECEX/ATEX/EAC	From -60°C (140°F) a +80°C (+176°F)	Not armored	OCTEXB3/4C	From 13mm (0.5in) a 20.2mm (0.8in)	–
				Armored	OCTEXBA3/4C	From 16.9mm (0.7in) a 26mm (1in)	–
IIB or IIA, Zone 2	With gasket	IECEX/ATEX/EAC	From -60°C (140°F) a +100°C (212°F)	Not armored	OCTEX3/4C	From 13mm (0.5in) a 20.2mm (0.8in)	–
				Armored	OCTEXA3/4C	From 16.9mm (0.7in) a 26mm (1in)	From 11.1mm (0.4in) a 19.7mm (0.8in)
		ATEX	From -20°C (-4°F) a +80°C (+176°F)	Not armored	OCTEX3/4	From 14mm (0.6in) a 17mm (0.7in)	–
				Armored	OCTEXA3/4	From 18mm (0.7in) thick glass a 23mm (0.9in)	From 14mm (0.6in) a 17mm (0.7in)

ANALOG CAMERAS (DAY/NIGHT)				
	Day/Night 36x		Day/Night 28x High sensitivity	
	PAL	NTSC	PAL	NTSC
Optical zoom	36x		28x	
Wide Dynamic Range (Fix/Auto)	✓		-	
True progressive SCAN	✓		-	
Digital image stabilisation	✓		✓	
White balance	Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)		Auto, ATW, Indoor, Outdoor (Fix/Auto), Sodium Vapor Lamp (Fix/Auto)	
High horizontal resolution	Up to 550 TV Lines		Up to 550 TV Lines	
Day/Night (Auto ICR)	✓		✓	
Image Sensor	1/4" EXView HAD CCD		1/4" Super HAD CCD II	
Number of effective Pixels	~ 440000 pixel	~ 380000 pixel	~ 440000 pixel	~ 380000 pixel
Min. Color illumination (IR-Cut Filter = OFF)	1.4Lux / 1/50s 0.1 Lux / 1/3s	1.4Lux / 1/60s 0.1 Lux / 1/4s	0.25Lux / 1/50s 0.16 Lux / 1/3s	0.25Lux / 1/60s 0.16 Lux / 1/4s
Min. B/W illumination	0.01 Lux / 1/3s	0.01 Lux / 1/4s	0.0015 Lux / 1/3s	0.0015 Lux / 1/4s
"Shutter Time" automatic increase to improve the night surveillance	✓		✓	
S/N ratio	Greater than 50dB		Greater than 50dB	
AE control	Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual		Automatic, Shutter priority, Diaphragm priority, Brightness priority and Manual	
Back light compensation	On/Off		On/Off	
Spherical masking (3D) of Privacy zones with automatic upgrade	✓		✓	
Privacy Zone Masking	On/Off (24 positions)		On/Off (24 positions)	
Maximum number of masking blocks to be displayed	8		8	
Resolution of masking blocks	160x120 HxV		160x120 HxV	
Masking	Up to 15 different masking types: 14 colour types or mosaic		Up to 15 different masking types: 14 colour types or mosaic	
Focusing system	Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual		Auto (Sensitivity: Normal, Low), Trigger PTZ, Manual	
"Smart" lens control	Automatic Lens Reset		Automatic Lens Reset	
High Zoom and Wide Horizontal Field of View Capability	✓		✓	
Optical zoom	36x, f=3.4 (wide) to 122.4mm (tele) / F1.6 to F4.5		28x, f=3.5 (wide) to 98mm (tele) / F1.35 to F3.7	
Digital Zoom	12x (432x with optical zoom)		12x (336x with optical zoom)	
Angle of view (A)	57.8 degrees (wide) to 1.7 degrees (tele)		55.8 degrees (wide) to 2.1 degrees (tele)	
Minimum object distance	320mm (12.6in) (wide) to 1500mm (59.1in) (tele)		10mm (0.4in) (wide) to 1500mm (59.1in) (tele)	
Electronic Iris Speed	1/1 ÷ 1/10000s		1/1 ÷ 1/10000s	

**TECHNICAL DRAWINGS**

Sizes in millimeters.

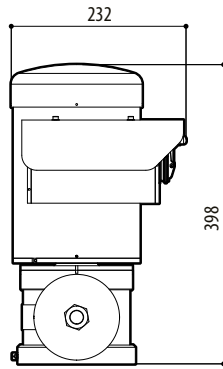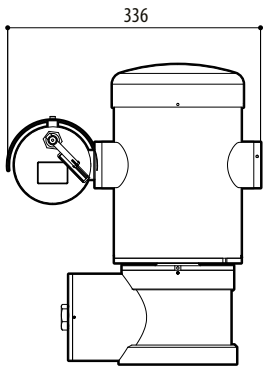

MAXIMUS MPX

