

SUPREME
A NEW DEFINITION OF HD



Speed Dome Network Camera

SD8362E-SS

20x Zoom • 2MP • Full HD • WDR • 60 fps
Extreme Weatherproof • PoE Plus



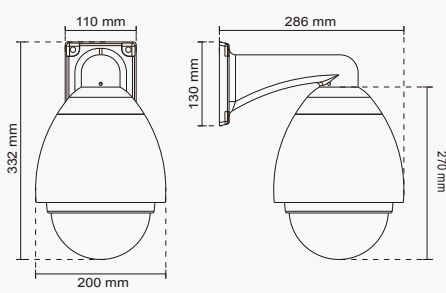
VIVOTEK SD8362E-SS is part of the SUPREME series product line offering 2-Megapixel or 1080p resolution with superb image quality. Adopting a 20x optical zoom lens, the SD8362E-SS is able to capture details at top-notch quality.

The IP66-rated housing protects the camera body against rain and dust within the wide temperature range between -40°C and 55°C. This feature ensures operation under extreme weather conditions. The SD8362E-SS is especially suitable for monitoring wide open indoor/outdoor spaces such as airports, highways and parking lots where high-level reliability and precision are always required.

The SD8362E-SS supports high-performance H.264/MPEG-4/MJPEG compression technology and offers extra smooth video quality with resolution up to 60 fps @ 720p and 30 fps @ 1080p. Boasting WDR technology, the SD8362E-SS can also cope with challenging lighting conditions and generate image quality close to the capabilities of the human eye. With sophisticated pan/tilt mechanism, the camera provides fast, precise movement with continuous 360-degree pan and 90-degree tilt. Users can easily control the lens position via a mouse or a joystick to track the object of interest and set up to 128 preset positions for patrolling.

As with all VIVOTEK true day/night cameras, the SD8362E-SS features a removable IR-cut filter, maintaining clear images 24 hours a day. Audio detection is another new feature available on the SD8362E-SS. By recognizing increases or decreases in sound volume, an additional layer of intrusion detection is ensured. With other advanced features such as 802.3at compliant PoE Plus and 60 fps high quality video, the SD8362E-SS is the best choice for the most demanding outdoor surveillance applications.

Technical Specifications

Pan/Tilt/Zoom <ul style="list-style-type: none"> · Pan range: 360° continuous rotation · Tilt range: 0° ~ 90° flip · 20x optical zoom · Pan speed: 0.1° ~ 300°/sec · Tilt speed: 0.1° ~ 120°/sec · Number of Presets: 128 · Auto pan mode · Auto patrol mode · 12x Digital Zoom 	Networking <ul style="list-style-type: none"> · 10/100 Mbps Ethernet, RJ-45 · Onvif support · Protocols: IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, and 802.1X
Lens <ul style="list-style-type: none"> · 20x optical zoom lens, f = 4.7 ~ 94 mm, F1.6 (wide), F3.5 (tele), auto focus, auto-iris, focus range: 10 mm (wide) ~ 800 mm (tele) to infinity · Removable IR-cut filter for day & night function 	Alarm and Event Management <ul style="list-style-type: none"> · Triple-window video motion detection · Audio detection · Three D/I and two D/O for external sensor and alarm · Event notification using HTTP, SMTP or FTP · Local recording of MP4 file
Angle of View <ul style="list-style-type: none"> · 2.9° ~ 55.4° (horizontal) 	Security <ul style="list-style-type: none"> · Multi-level user access with password protection · IP address filtering · HTTPS encrypted data transmission · 802.1X port-based authentication for network protection
Shutter Time <ul style="list-style-type: none"> · 1/1 sec. to 1/10,000 sec. 	Users <ul style="list-style-type: none"> · Live viewing for up to 10 clients
Image Sensor <ul style="list-style-type: none"> · 1/3" SONY CMOS Progressive Sensor in 1920x1080 resolution · Signal to Noise Ratio: 50dB 	Weight <ul style="list-style-type: none"> · Net: 3,400 g
Minimum Illumination <ul style="list-style-type: none"> · 0.02 Lux @ F1.6 (Color) · 0.001 Lux @ F1.6 (B/W) 	LED Indicator <ul style="list-style-type: none"> · System power and status indicator · System activity and network link indicator
Video <ul style="list-style-type: none"> · Compression: H.264, MJPEG & MPEG-4 · Streaming: <ul style="list-style-type: none"> Multiple simultaneous streams (up to 4 individual configurable streams) H.264 streaming over UDP, TCP, HTTP or HTTPS MPEG-4 streaming over UDP, TCP, HTTP or HTTPS H.264/MPEG-4 multicast streaming MJPEG streaming over HTTP or HTTPS · Supports activity adaptive streaming for dynamic frame rate control · Supports 3GPP mobile surveillance · Frame rates: <ul style="list-style-type: none"> H.264: <ul style="list-style-type: none"> Up to 60 fps at 1280x720 Up to 30 fps at 1920x1080 MPEG-4: <ul style="list-style-type: none"> Up to 60 fps at 1280x720 Up to 27 fps at 1920x1080 MJPEG: <ul style="list-style-type: none"> Up to 60 fps at 1280x720 Up to 30 fps at 1920x1080 (Up to 30/15 fps in WDR mode) 	Power <ul style="list-style-type: none"> · 24V AC · Power consumption: Max. 60 W · 802.3at compliance PoE plus
Image Settings <ul style="list-style-type: none"> · Adjustable image size, quality and bit rate · Time stamp and text caption overlay · Flip & mirror · Configurable brightness, contrast, saturation, sharpness, white balance and exposure · AGC, AWB, AES · WDR Pro · Automatic, manual or scheduled day/night mode · BLC (Backlight Compensation) · Supports up to 24 3D privacy masks 	Housing <ul style="list-style-type: none"> · Weather-proof IP66-rated housing
Audio <ul style="list-style-type: none"> · Compression: <ul style="list-style-type: none"> GSM-AMR speech encoding, bit rate: 4.75 kbps to 12.2 kbps MPEG-4 AAC audio encoding, bit rate: 16 kbps to 128 kbps G.711 audio encoding, bit rate: 64 kbps, μ-Law or A-Law mode selectable. · Interface: <ul style="list-style-type: none"> External microphone input Audio output · Supports two-way audio · Supports audio mute 	Approvals <ul style="list-style-type: none"> · CE, LVD, FCC, VCCI, C-Tick Operating Environments <ul style="list-style-type: none"> · Temperature: -40°C ~ 55°C (AC 24V) · Temperature: -10°C ~ 55°C (PoE Plus) · Humidity: 90% RH
	Viewing System Requirements <ul style="list-style-type: none"> · OS: Microsoft Windows 7/Vista/XP/2000 · Browser: Mozilla Firefox, Internet Explorer 6.x or above · Cell phone: 3GPP player · Real Player: 10.5 or above · Quick Time: 6.5 or above
	Installation, Management, and Maintenance <ul style="list-style-type: none"> · Installation Wizard 2 · 32-CH ST7501 recording software · Supports firmware upgrade
	Applications <ul style="list-style-type: none"> · SDK available for application development and system integration
	Warranty <ul style="list-style-type: none"> · 36 months
	Dimension <ul style="list-style-type: none"> · Camera: \varnothing 200 mm x 270 mm · Cable length: 1330 mm · Cable diameter: \varnothing 15 mm; Max width: \varnothing 20 mm 

All specifications are subject to change without notice. Copyright © 2012 VIVOTEK INC. All rights reserved. P/N: 971005700



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.
| T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com

VIVOTEK USA, INC.
2050 Ringwood Avenue, San Jose, CA 95131
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com