

Product Information

Software

Access/MON/4 software for the image reproduction of Axis network cameras and network servers and for access control via network

Product Data

- picture reproduction of network cameras and network servers
- connection of up to 4 cameras
- single picture / quad display
- automatic switching
- feedback control, e.g. opening a door
- recording of sequences
- export of sequences



Description

The Access/MON/4 software allows picture reproduction of Axis network cameras and network servers over IP networks. The pictures of up to four cameras can be viewed either in single picture or in quad mode. The very high refresh rate of up to 25 frames per second allows a 'near to live' transmission over network.

An additional feature of the software is its interactive control. The software allows e.g. to switch a contact at the camera or at the server which in turn can open a door. The only thing required is a short cable connection between camera and door. All other communication is carried out entirely over the existing network.

An alarm triggering by the camera (external contact or e.g. motion detector) allows to automatically display the software on the screen foreground. A *.wav audio file can be replayed - calendar-dependent - parallel to this, directing the viewer's attention to the event. It is also possible start other software applications by an alarm.


Pictures can be recorded either manually or automatically with the software. The pictures are stored on a PC or on a server in the network. The software provides different search filters for recorded sequences; among these time/date and camera number. Complete sequences incl. viewer can be exported in a specially protected format (authenticity). An export of individual pictures is also possible.

Security in Focus.

videotronic[®]
infosystems

Software

System Drawing

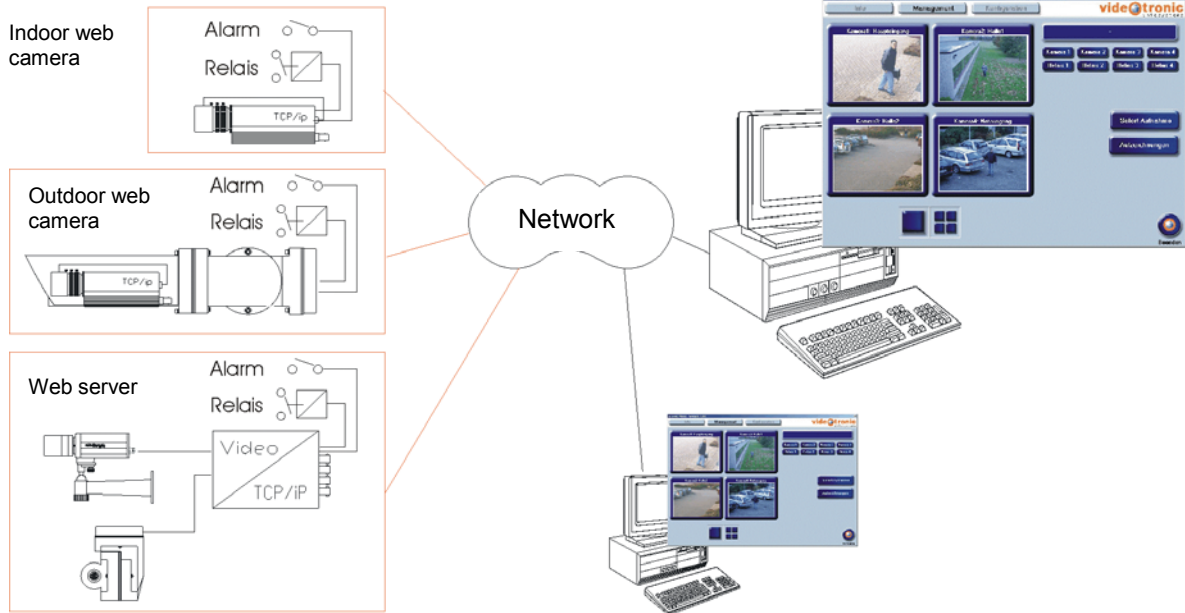

Start screen with password inquiry



Configuration screen



Single picture display



Quad display

Security in Focus.

Software

Technical Specifications

Connection	Axis network cameras and network servers over IP network
Network	LAN (TCP/IP)
Number of cameras	4
Picture display	single picture / quad
Refresh rate	up to 25 frames / second, depending on the connected Axis components
Alarm control	yes, via max. 4 alarm inputs, depending on the connected Axis component
Sound (speech) samples	yes, activation in case of alarm, depending on the calendar
Automatic program start	in case of alarm
Automatic switching	yes (e.g. automatically switching the software to the screen foreground)
Control function	yes, via max. 4 relays, depending on the connected Axis component (e.g. for opening a door)
Picture recording	manually or alarm-triggered on local PC or server
Export of sequences	yes, incl. viewer
Required operating system	Windows 98 / 2000 / XP / NT4 (SP6)
Accessories included	operating instructions

Security in Focus.

© videotronic infosystems gmbh, Germany 05/2002
Errors and omissions excepted.

videotronic[®]
infosystems