



Networked Video

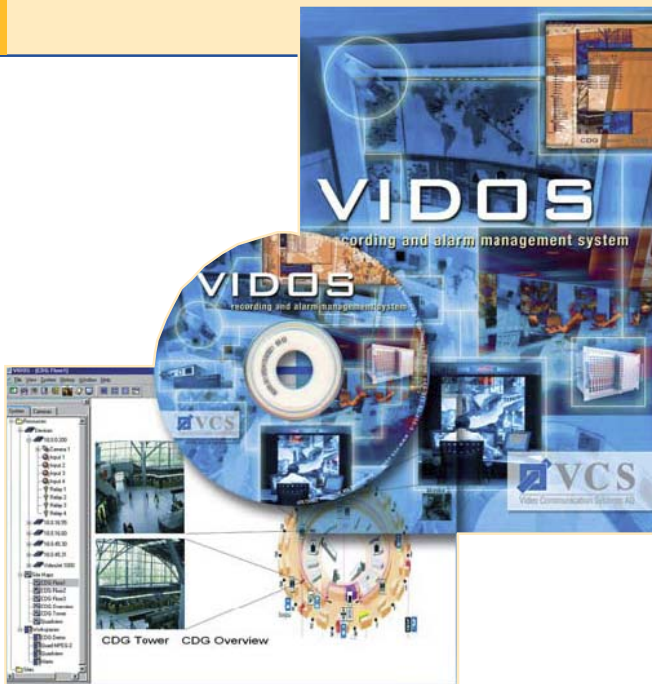

VIDOS

Video Management System

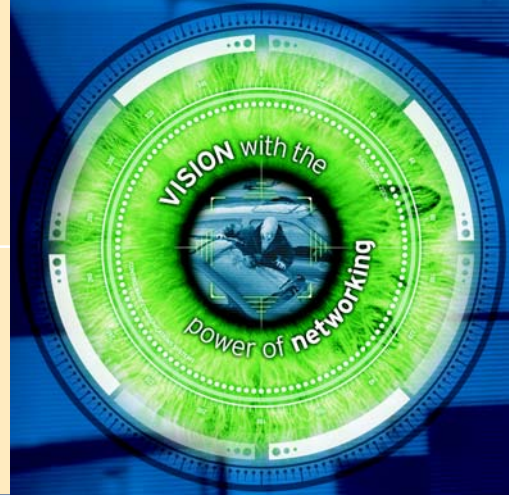

- » All-in-one alarm centre solution
- » Site-map based
- » Matrix features for camera management
- » Full remote control
- » Support of display on hardware monitors
- » Automated guard tours
- » Comprehensive data bases and alarm stacks
- » Sophisticated playback features
- » Multicasting
- » Available with preconfigured hardware
- » Extendible with VIDEOS-NVR


Introduction

VIDOS is a unique and powerful video surveillance and alarm management product that enables companies to operate professional security and surveillance tasks with the ease of a mouse click. Based on the intuitive concept of sitemaps VIDEOS makes the user feel in control and on top of all issues.

VIDOS is fully customizable and allows you to run your security system exactly the way you want to. It adapts to your working habits, unlike other systems on the market that require you to learn new principles.

VIDOS integrates with all existing peripheral equipment like dome cameras and analogue monitors. With its sophisticated touring and patrolling functions, automatic recording tasks and comprehensive archive features VIDEOS is offering functionality and performance unprecedented in CCTV applications.

VIDOS is available as software only, supporting 16, 32, 64 or an unlimited number of cameras and monitors, optionally you can choose from two preconfigured hardware solutions for easiest integration.

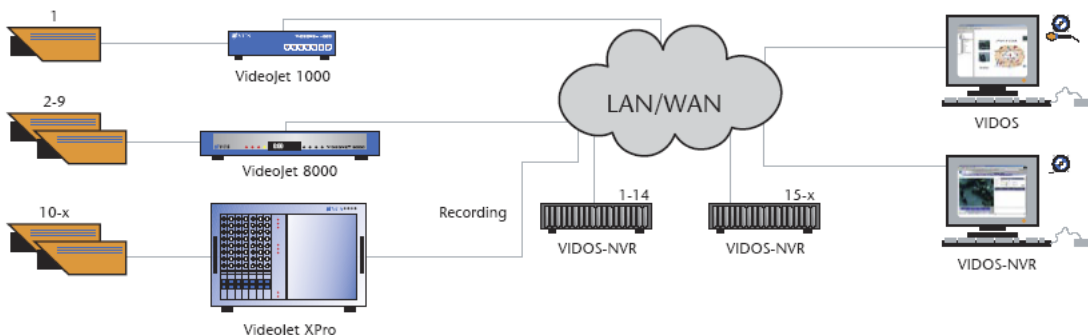

Technical specifications

System Requirements

Hardware	Personal Computer
CPU	Pentium IV, 1.8 GHz or better
Hard Disk Interface	IDE or better
RAM	256 MByte
OS	Windows 2000 Workstation/XP
Graphic Card	ATI RADEON 8500, 9500 or 9800, NVIDIA GeForce 3 or 4, Matrox Parhelia or similar
Ethernet Card	100 MBit
Sound Card	Recommended
Software	DirectX 9.0
Free Memory (Inst.)	50 MByte

Software Features

Tree View	User configurable, Explorer style resource tree
Display	Connection control by drag&drop User definable video windows Built-in electronic zoom function (MPEG-4) Simultaneous viewing of several video streams Full screen mode viewing On-screen or in picture p/t camera control dialog Multiple, user definable workspaces Window snap function Addition of multiple external monitors JPEG snapshot overview of all connected devices
Scan Network	Autoscan function over the complete network JPEG snapshot overview of all devices Remote upload of devices via LAN/WAN Scan result copy to a clipboard by mouse click
Site Map	Built-in site map editor Definition of background graphics (bitmaps) User definable symbols with programmable functions, e.g. Hyperlinks Placing of fully scalable software monitors Support of external hardware monitors Automatic camera activation on alarm
Configuration	Definition of user groups and user rights Setting of device properties Setting of device COMs for remote camera control Programming of preset camera sequences (Salvos)
Trigger and Alarm	Creation of logical triggers Scheduler with definable time spans Alarm stack log saving Programming of different alarm triggered jobs Integrated alarm testing button Action plans for alarm handling integrable
Recording	JPEG snapshot recording Recording to on-site storage media (e.g. VideoJet 1000): Simultaneous recording of video, audio and transparent data Scheduled and alarm recording Ring recording function per camera Synchronous playback of multiple cameras
NVR (option)	Full Network Video Recording functionality and advanced recording features by implementation of VIDOS-NVR modules (see resp. data sheet)

Ordering Information

Article Code	Description
59.600.350416	VIDOS License to manage up to 16 Cameras and Monitors for one PC
59.600.350432	VIDOS License to manage up to 32 Cameras and Monitors for one PC
59.600.350464	VIDOS License to manage up to 64 Cameras and Monitors for one PC
59.600.3504	VIDOS License to manage unlimited Number of Cameras and Monitors on one PC
On demand	Preconfigured PCs for optimal VIDOS performance

Germany

Controlware GmbH
International Headquarters
Waldstrasse 92
D-63128 Dietzenbach
Tel. +49 60 74 85 8-0
Fax +49 60 74 85 8-191
e-mail: cwp-info@controlware.de
www.controlware-products.com

Australia

Controlware Australia Pty. Ltd.
Tel. +61 2 88 53 92 00
e-mail: sales@cware.com.au

Belgium

Controlware Central Europe
Tel. +32 2 712 02-00
e-mail: info@controlware.be

France

Controlware France S.A.
Tel. +33 1 46 12 77 00
e-mail: commercial@controlware.fr

Switzerland

Controlware AG
Tel. +41 55 415 64 74
e-mail: info@controlware.ch

United Kingdom

Controlware Communications Systems Ltd.
Tel. +44 1653 584 500
e-mail info@cware.co.uk

United States of America

Controlware Inc.
Tel. +1 732 919 04 00
e-mail info@cware.com

Locations in Germany:

Berlin, Düsseldorf, Frankfurt, Hamburg,
Hannover, Ingolstadt, Kassel, Leipzig,
München, Stuttgart

[access_the_world](#)

controlware
communicationssystem