


DS-2CE16C5T-IT5

HD720P Turbo HD EXIR Low Light Bullet Camera




EXIR

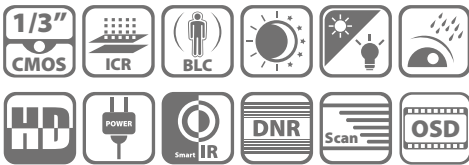

Key features

- HD720P Video Output
- Adopt HDTV Technology
- True Day/Night
- OSD menu, 3D DNR, Smart IR
- EXIR technology, 80m IR distance
- IP66 weatherproof
- Low illumination
- Up the Coax(via coaxial cable)

Dimensions

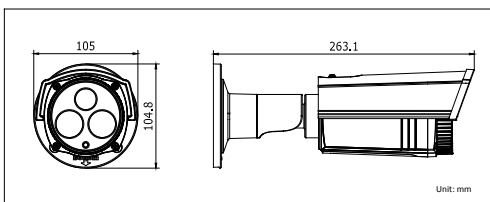

Accessories



Video balun
DS-1H18

Available models

DS-2CE16C5T-IT5

DS-2CE16C5T-IT5	
Camera	
Image Sensor	1 / 3" Progressive Scan CMOS
Signal System	PAL / NTSC
Effective Pixels	1305(H)*1049(V)
Min. Illumination	0.001 Lux @(F1.2,AGC ON), 0 Lux with IR
Shutter speed	PAL: 1 / 50 s to 1 / 50,000 s NTSC: 1 / 60 s to 1 / 50,000 s
Lens	3.6mm (6mm, 8mm, 12mm, 16mm optional) Angle of View: 71.43°(3.6mm), 46.9°(6mm), 34.5°(8mm), 22.81°(12mm), 17.2°(16mm)
Lens Mount	M12
Day & Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	PAL: 720p@50fps / NTSC: 720p@60fps
HD Video Output	1 Analog HD output
CVBS Output	1Vp-p Composite Output(75Ω / BNC)
S / N Ratio	More than 62dB
Menu	
Automatic Exposure	Globe AE / DWDR
AGC	Low / Middle / High / Off
Slow Shutter	Support
White Balance	Auto / Manual
D / N Mode	Color / BW / SMART IR
3D DNR	Low / Middle / High / Off
Motion Detection	Support, maximum 4 zones
Privacy Mask	On / Off, maximum 8 zones
UTC Function	Support
Language	English / Chinese
Function	Digital Wide Dynamic Range, 3D Digital Noise Reduction, Sharpness, Brightness, Digital Zoom, Mirror
General	
Working Temperature / Humidity	-30 °C - 60 °C (-22 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Max. 4.5W
Weather Proof Ratings	IP66
IR Range	Up to 80m
Communication	Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron)
Dimensions	105×104.8×263.1mm(4.13" ×4.13" ×10.36")
Weight	800 g (1.76 lbs)