

8Ch Standalone DVR


SHR-6080/6082 NEW




Features

- 8CH DVR
- Video (MPEG-4) / Audio(ADPCM)
- Up to 120(NTSC)/100(PAL) IPS Recording Rate
- Up to 4Ch Audio Inputs and 1Ch Audio Output
- Combined BNC and VGA Video Output for main display (up to 1280x1024)
- SHR-6080 : MAX 6 Internal HDD (HDDx6)
SHR-6082 : MAX 5 Internal HDD (HDDx5)
- HDD & DVD SATA Interface
- DDNS
- Built-in Web viewer
- DVD R/W (SHR-6082)
- Event Notifications by E-mail

Dimensions (unit:mm)

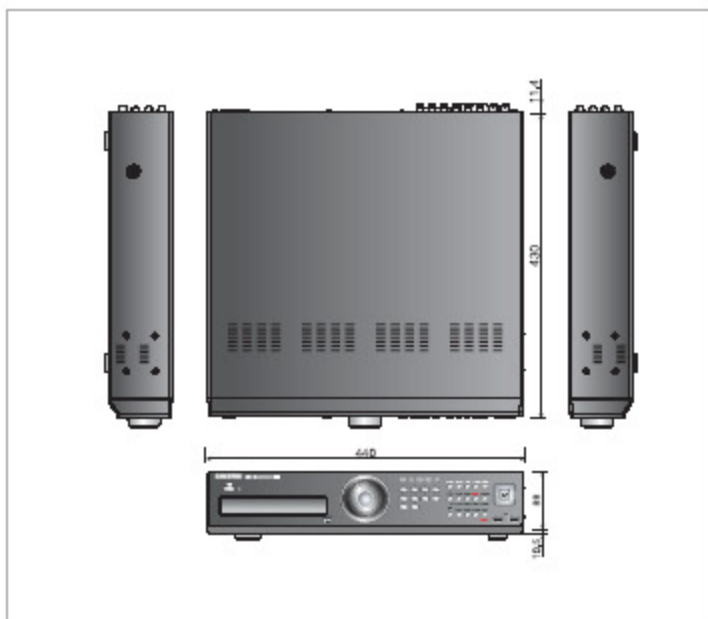

Rear Panel

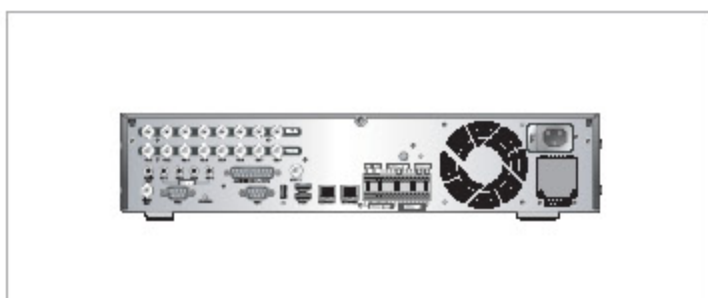

Specifications

| Model | SHR-6080 | SHR-6082 |
|--|---|---|
| System | Multi Language Support (16EA) | |
| Language | • | |
| System Log / Event Log | • | |
| Storage set up (Capacity Notification) | • | |
| O/S | Linux | |
| Resolution Level | CIF / Half D1 / D1 | |
| Live Resolution | 704 x 480 (NTSC) / 704 x 576 (PAL) | |
| Codec (Video / Audio) | MPEG-4 / ADPCM | |
| HDD | 250 (Basic) / 500 / 750 / 1,000G (SATA) | |
| Built In HDD Capacity | 6EA | 5EA |
| Network Time Protocol (NTP) | • | |
| Daylight Saving (Summer Time) | • | |
| Text Data Recording (for POS) | • * | |
| Jog Shuttle | • | |
| System Keyboard Controller (SSC-5000) | • | |
| RS-485 | • | |
| Video | 8 | |
| Audio In/Out | 4/1 | |
| Mouse I/F | • | |
| Firmware update | • (Network / USB / CD / DVD) | |
| Set up file Export/Import | • | |
| Play back | Speed | |
| | x1/2, 1/4, 1/8, 2, 4, 8, 16, 32, 64 | |
| | Resolution&Frame Rate | NTSC |
| | | CIF:120ips / Half D1:60ips / D1:30ips |
| | | PAL |
| | | CIF:100ips / Half D1:50ips / D1:25ips |
| Recording | Record Rate | NTSC |
| | | CIF:120ips / Half D1:60ips / D1:30ips |
| | | PAL |
| | | CIF:100ips / Half D1:50ips / D1:25ips |
| | Normal | • |
| | Schedule(continuous / Event) | • |
| | Event | • |
| | Time Lapse | • |
| | Time Lapse Spec | NTSC : 0.9/1.9/3.8/7.5/15 ips - PAL : 0.8/1.6/3.1/6.2/12.5 ips |
| Event Rec | Alarm Input/Output | 8/4 |
| | Event REC Duration(PRE) | 5,10, 20, 30 Sec |
| | Event REC Duration(POST) | 5, 10, 20, 30 sec / 1, 3, 5, 10, 20 min |
| | Motion | • (3 Step) |
| | Video loss | • |
| | Notification (E-mail) | • E-mail (Motion/Alarm/Video Loss/Power On&Off/Normal Rec Start & Stop/HDD Problem/Change password) |
| Search | Time Search / Event Search | • |
| | Back up Search / Pos Search | • |
| | Motion Search | • (1hr limit) |
| | Preview Search | • |
| Back up | DVD | x |
| | USB | • (Version 2.0), 3EA |
| | Format | AVI(*.avi) / EXE(*.exe) / DVR(*.bu) |
| Network | Simultaneous Network Connection | Live Monitoring 10 / Search 1 Person |
| | Network Spec | Cable Modem, Lan, ADSL |
| | Network (TCP/UDP) | • |
| | Web viewer S/W / CMS Support | • |
| | Web viewer / BACK UP | • |
| | P/T/Z / DDNS | • |
| | Bandwidth setup | Unlimited/2/1.5/1 Mbps /800/600/500/400/300/128 kbps |
| Camera | P/T/Z Device | Samsung/Pelco-D/Pelco-p/Panasonic/Phillips/AD/DIAMOND/ERNA/KALATEL/VCL TP/VICON (Total 12ea) |
| Monitor | Dual Output (VGA/BNC) | • |
| Video Out | Composite | • (BNC 1EA) |
| | Spot | • (1EA) |
| | VGA | • 800x600 (60Hz) /1024x768 (60Hz) /1280x1024 (60Hz) |
| Storage | 6EA (Without DVD) | 5EA (With DVD) |
| Dimension | 440(W) x 88(H) x 430(D) mm | |
| Weight | 7.3Kg | |

* I/F With VSI-Pro